


Signature	Revision History	Date	Rev.
N.Xu	For Bulk Production	Dec.08.2007	01

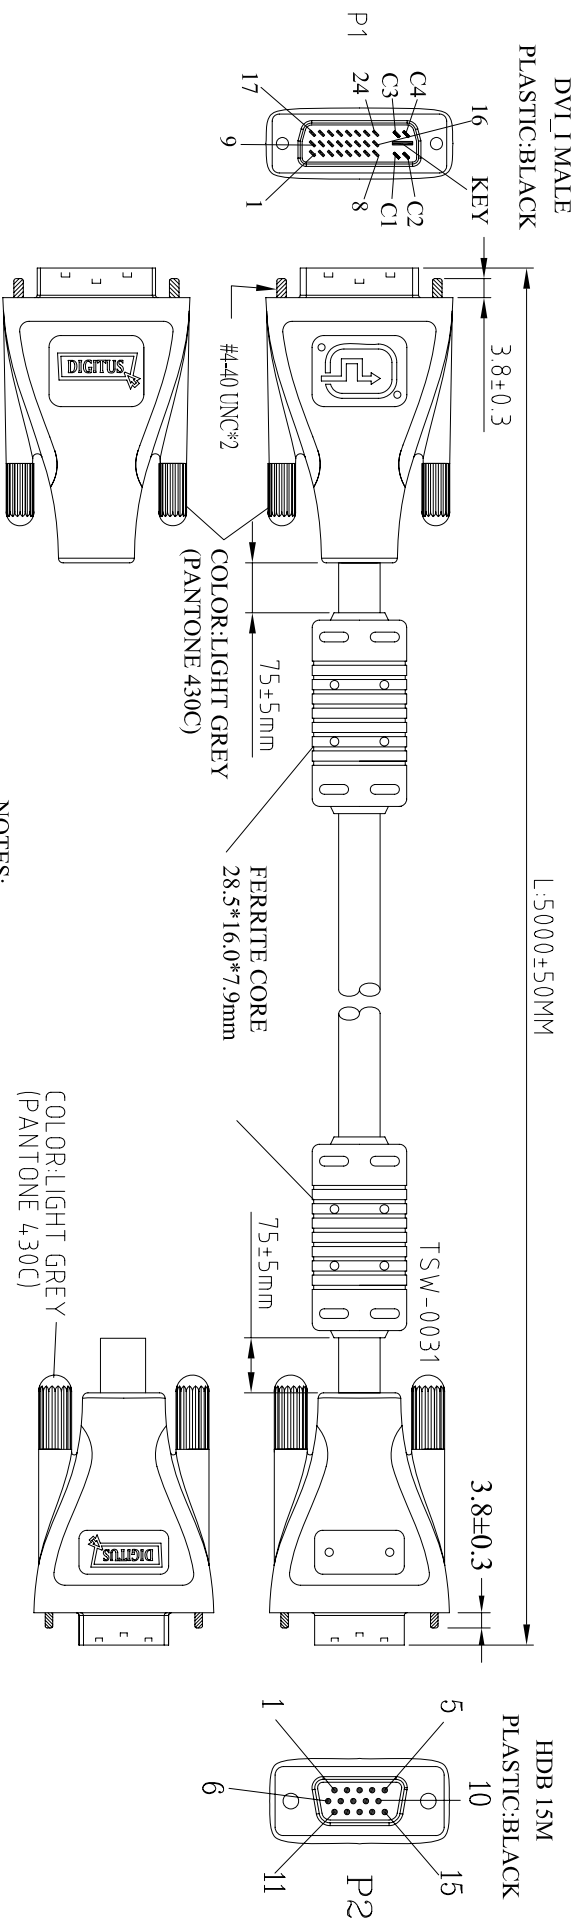

**NOTES:**

- CABLE: 30AWG(7/0.102)COAXIALx3C+28AWG(7/0.127)x5C+28AWG(7/0.127)\*1PAIR+AL/MYLAR+DRAIN WIRE+BRAID SHIELD+JACKET:PVC OD:7.0±0.15mm COLOR:BLACK UL 20276 APPROVED.
- CONNECTOR:  
 P1: DVI 29P: 24P+4+KEY DIGITAL/ANALOG GOLD FLASH CONTACT NICKEL PLATED SHELL  
 P2: HDB 15P MALE GOLD FLASH CONTACT NICKEL PLATED SHELL  
 3.SHEILD: P1&P2 COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE SHIELDING  
 4.HOOD: FIRST MOLD:MOLDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)  
 SECOND MOLD:MOLDED TYPE,PVC 45P COLOR:BLACK.  
 5.PACKING: SEE P-0039 PACKING DRAWING  
 (BINDING SIZE MUST BE SMALLER THAN BLISTER)

**WIRE CONNECTION**

P1	WIRE COLOR	P2
6		15
7		12
8		14
14,16		9
15		5,10
C1		1
KEY		6
C2		2
KEY		7
C3		3
KEY		8
C4		13
SHELL: BRAID SHELL: SHELL		

RoHS Compliant

Date	Name	Part No.
Dec.08.2007	N. Xu	<b>DK-110036</b>
Dec.08.2007	A.Dan	
Dec.08.2007	T.Aulemann	

**ASSMANN**  
Electronic GmbH

Title: DVI 24+5 MALE TO VGA MALE CABLE  
2COLOR MOLD WITH DIGITUS LOGO

Scale: N/A      Sheet: 1/1

A	B	C	D	E	F	G	H
1	2	3	4	5	6	7	8