



Signature	Revision History	Date	Rev.
N.Xu	For Bulk Production	Dec:08,2007	01

USB A TYPE MALE
1000±20MM

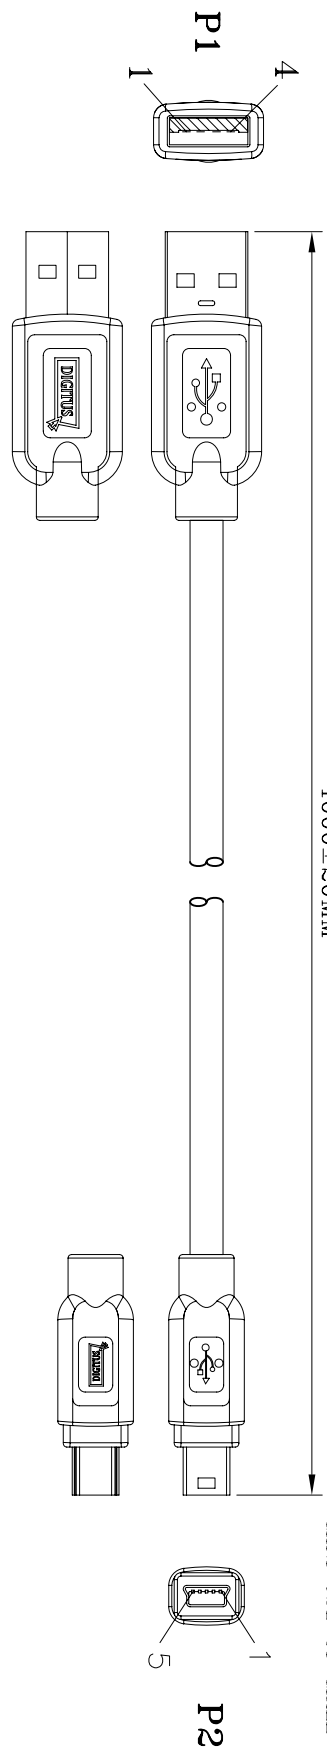

D NOTE:

- 1.CABLE: UL-2725 [28AWG(7/0.127TC)]*1PAIR INS:HD-PE+24AWG(7/0.203TC)*2C INS:SR-PVC +AL-FOIL/MYLAR+DRAIN WIRE+BRAID(50%)TIN PVC JACKET OD:Ø4.7±0.15mm COLOR:BLACK.
- 2.CONNECTOR:
- P1:USB A TYPE MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.
- P2:MINI USB B TYPE 5P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.
- 3.HOOD:FIRST MOLD:MOULDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOULDED TYPE,PVC 45P COLOR:BLACK.
- 4.ELECTRICAL TEST:
- <1>.100% OPEN SHORT & MIS WIRE TEST.
- <2>.CONTACT RESISTANCE 3 OHM MAX.
- <3>.INSULATION RESISTANCE 10M OHM MIN.
- 5.PACKING:SEE P-0039 PACKING DRAWING

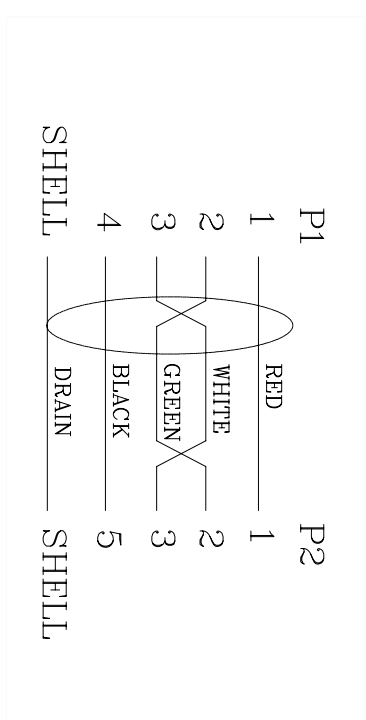

(BINDING SIZE MUST BE SMALLER THAN BLISTER)

RoHS Compliant

Part No.		DK-112024
Date	Name	
Drawn by	N. Xu	
Checked by	ALDan	
Approved by	Dec:08,2007	T.Aulemann

ASSMANN Electronic GmbH		
Title USB A(M)-MINI USB 5P(M) CABLE 2 COLOR MOLD WITH DIGITUS LOGO		
Scale	N/A	Sheet
Unit	MM	1/1

1	2	3	4	5	6	7	
A	USB A TYPE MALE 1000±20MM MINI USB 5P MALE						A
B							B
C							C
D	NOTE: 1.CABLE: UL-2725 [28AWG(7/0.127TC)]*1PAIR INS:HD-PE+24AWG(7/0.203TC)*2C INS:SR-PVC +AL-FOIL/MYLAR+DRAIN WIRE+BRAID(50%)TIN PVC JACKET OD:Ø4.7±0.15mm COLOR:BLACK. 2.CONNECTOR: P1:USB A TYPE MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL. P2:MINI USB B TYPE 5P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL. 3.HOOD:FIRST MOLD:MOULDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOULDED TYPE,PVC 45P COLOR:BLACK. 4.ELECTRICAL TEST: <1>.100% OPEN SHORT & MIS WIRE TEST. <2>.CONTACT RESISTANCE 3 OHM MAX. <3>.INSULATION RESISTANCE 10M OHM MIN. 5.PACKING:SEE P-0039 PACKING DRAWING (BINDING SIZE MUST BE SMALLER THAN BLISTER)						D
E							E
F							F
G	(BINDING SIZE MUST BE SMALLER THAN BLISTER)						G
H	<div style="border: 1px solid green; padding: 2px; display: inline-block;">RoHS Compliant</div>						H
1	2	3	4	5	6	7	