
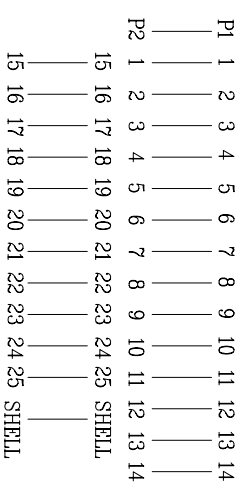


Signature	Revision History	Date	Rev.
	For Bulk Production	Dec.08.2007	01

DB 25/M  
PLASTIC:BLACK

5000±50

DB 25/F  
PLASTIC:BLACK

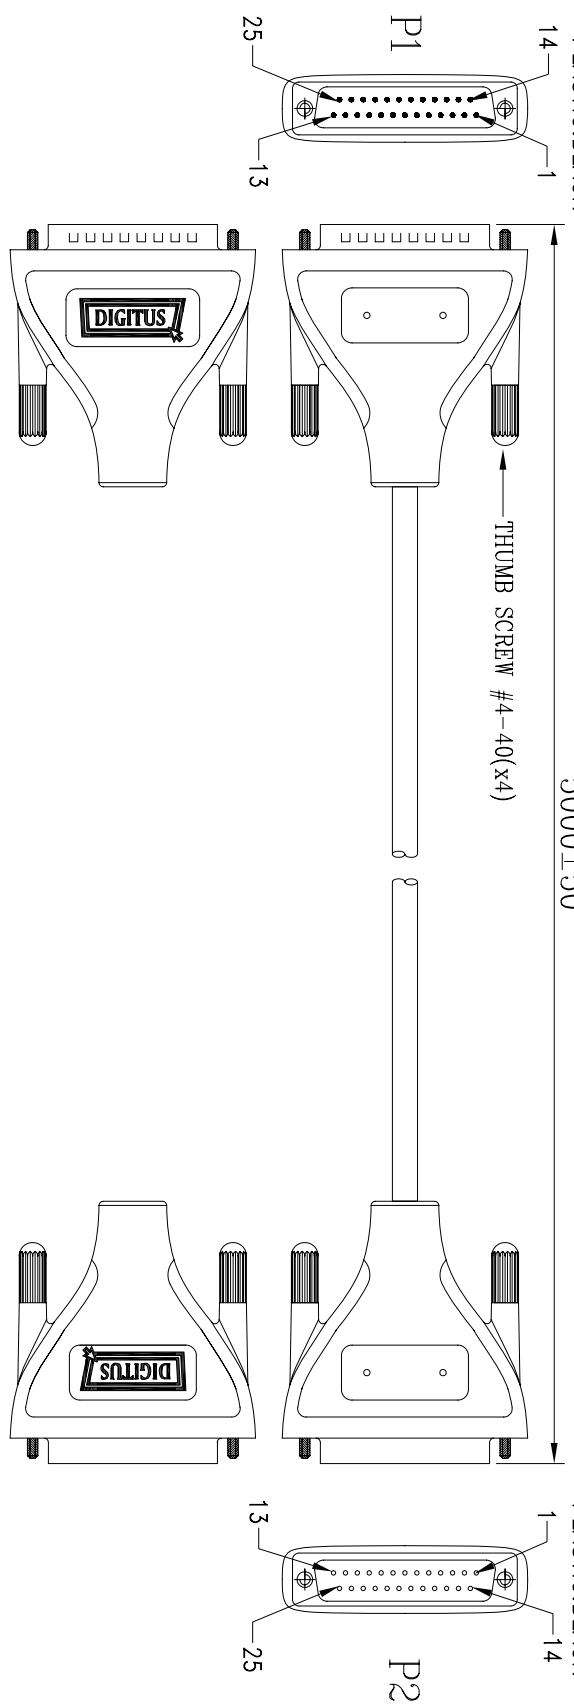

NOTE :

1. CABLE:NON-UL 28AWG(7/0.127 T.C)\*25C INS:PVC +DRAIN WIRE+AL/MYLAR PVC JACKET;  
COLOR:BLACK, OD:7.0±0.2mm
2. CONNECTOR:  
P1:DB 25P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL.  
P2:DB 25P FEMALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL.
3. HOOD:MOLDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)  
SECOND MOLD:MOLDED TYPE,PVC 45P,COLOR:BLACK.
4. TEST REQUEST:100% OPEN SHORT & MIS WIRE TEST,  
CONTACT RESISTANCE 3 OHMS MAX  
INSULATION RESISTANCE 5M OHMS MIN
5. PACKING:SEE P-0039 PACKING DRAWING  
(BINDING SIZE MUST BE SMALLER THAN BLISTER)

1	2	3	4	5	6	7	A
1	2	3	4	5	6	7	B
1	2	3	4	5	6	7	C
1	2	3	4	5	6	7	D
1	2	3	4	5	6	7	E
1	2	3	4	5	6	7	F
1	2	3	4	5	6	7	G
1	2	3	4	5	6	7	H

RoHS Compliant

S181407

Date	Name
Dec.08.2007	N. Xu
Dec.08.2007	A.Dan
Dec.08.2007	T.Aulemann

Part No.	DK-113007
Title	Printer cable, extension ,D-Sub 25 2 COLOR MOLD WITH DIGITUS LOGO
Scale	N/A
Unit	MM
Sheet	1/1

**ASSMANN**  
Electronic GmbH