




Signature	Revision History	Date	Rev.
	For Bulk Production	Dec.08.2007	01


**A** DB 25/M  
PLASTIC:BLACK

1800±30

**CN 36/M**  
PLASTIC:BLACK

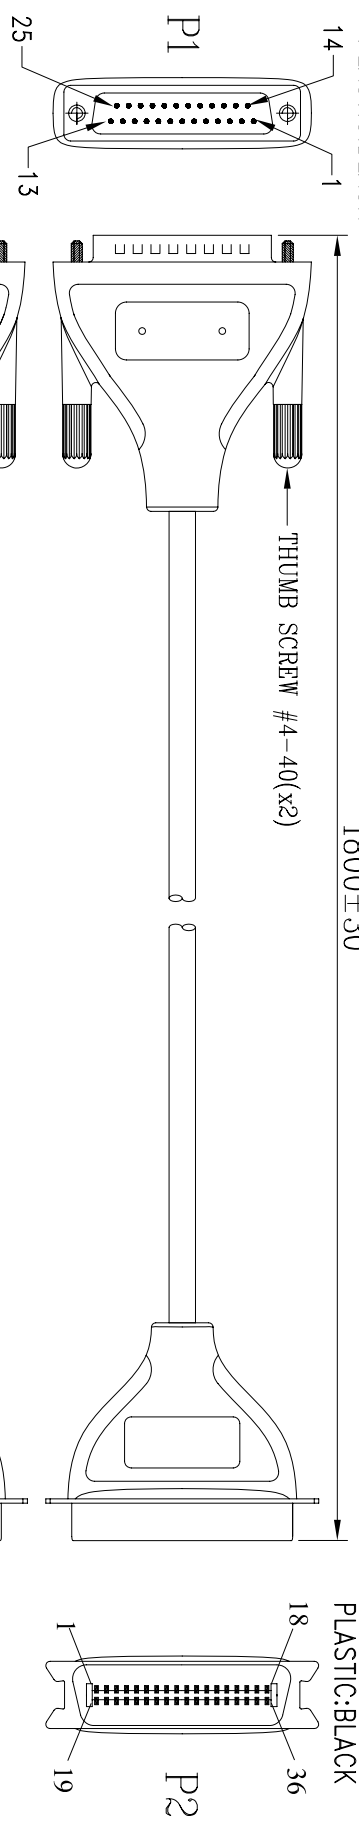

**CABLE WITH UL,IEEE 1284 IMPRINTING**

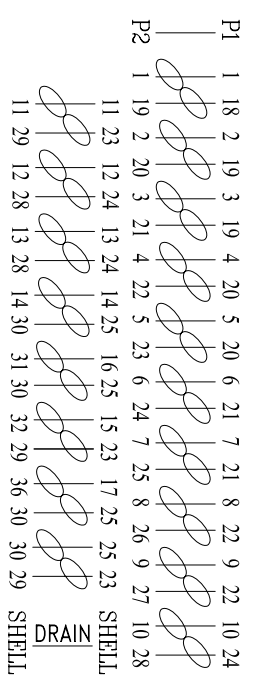

**NOTES:**

- 1.CABLE:UL-20276 28AWG(7/0.127 T.C)\*18P INS.:PP+AL/MYLAR+ DRAIN WIRE:26AWG(7/0.16 T.C)+BRAID(85%) PVC JACKET; COLOR:BLACK.OD:Ø7.5±0.15mm.
- 2.CONNECTOR:
- P1:DB 25P MALE.GOLD FLASH CONTACT.NICKEL PLATED SHELL.
- P2:CN 36P MALE.GOLD FLASH CONTACT.NICKEL PLATED SHELL.
- 3.SHIELD:COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID.
- 4.HOOD:FIRST MOLD:MOLEDDED TYPE.PVC 30P.COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOLEDDED TYPE.PVC 45P.COLOR:BLACK.
- 5.TEST REQUEST:100% OPEN SHORT & MIS WIRE TEST, CONTACT RESISTANCE 3 MAX. INSULATION RESISTANCE 10M MIN.
- 6.PACKING:SEE P-0039 PACKING DRAWING (BINDING SIZE MUST BE SMALLER THAN BLISTER)

Part No.		<b>DK-113011</b>
Drawn by	Date	
Dec.08.2007	N. Xu	
Checked by	Date	
Dec.08.2007	ALDan	
Approved by	Date	
Dec.08.2007	T.Aulemann	

**RoHS Compliant**

S181407

<b>ASSMANN</b> Electronic GmbH		Title Printer cable, Connect. D-Sub 25-Cent 36 2 COLOR MOLD WITH DIGITUS LOGO
Scale	N/A	
Unit	MM	Sheet 1/1

1	2	3	4	5	6	7	A
1	2	3	4	5	6	7	B
1	2	3	4	5	6	7	C
1	2	3	4	5	6	7	D
1	2	3	4	5	6	7	E
1	2	3	4	5	6	7	F
1	2	3	4	5	6	7	G
1	2	3	4	5	6	7	H