




Signature	Revision History	Date	Rev.
	For Bulk Production	Dec.08.2007	01

A DB 25/M
PLASTIC:BLACK

3000±30

CN 36/M
PLASTIC:BLACK

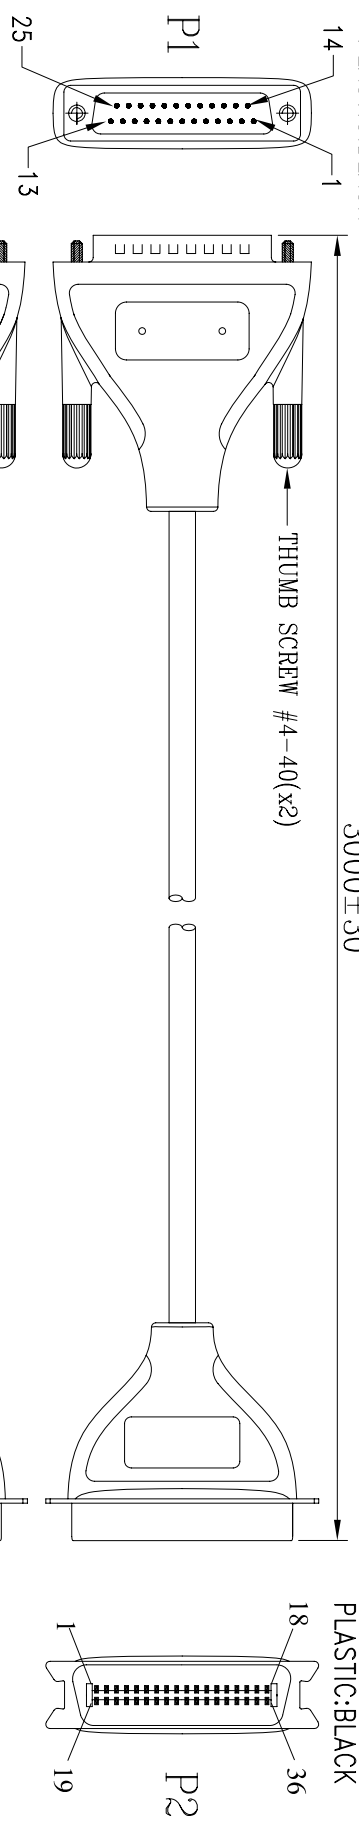

CABLE WITH UL,IEBEE 1284 IMPRINTING

P1	1	18	2	19	3	19	4	20	5	20	6	21	7	21	8	22	9	22	10	24
P2	1	19	2	20	3	21	4	22	5	23	6	24	7	25	8	26	9	27	10	28
	11	23	12	24	13	24	14	25	16	25	15	23	17	25	25	23				
	11	29	12	28	13	28	14	30	31	30	32	29	36	30	30	29				

DRAIN SHELL

- NOTES:**
- CABLE:UL-20276 28AWG(7/0.127 T.C)*18P INS.:PP+AL/MYLAR+ DRAIN WIRE:26AWG(7/0.16 T.C)+BRAID(85%) PVC JACKET; COLOR:BLACK.OD:Ø7.5±0.15mm.
 - CONNECTOR:
 - P1:DB 25P MALE.GOLD FLASH CONTACT.NICKEL PLATED SHELL.
 - P2:CN 36P MALE.GOLD FLASH CONTACT.NICKEL PLATED SHELL.
 - SHIELD:COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID.
 - HOOD:FIRST MOLD:MOLEDDED TYPE.PVC 30P.COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOLEDDED TYPE.PVC 45P.COLOR:BLACK.
 - TEST REQUEST:100% OPEN SHORT & MIS WIRE TEST; CONTACT RESISTANCE 3 MAX. INSULATION RESISTANCE 10M MIN.
 - PACKING:SEE P-0039 PACKING DRAWING (BINDING SIZE MUST BE SMALLER THAN BLISTER)

Date	Name
Dec.08.2007	N. Xu
Dec.08.2007	ALDan
Dec.08.2007	T.Aulemann

Part No.
DK-113012

ASSMANN
Electronic GmbH

Title
Printer cable, Connect. D-Sub 25-Cent 36
2 COLOR MOLD WITH DIGITUS LOGO

Scale N/A
Unit MM

Sheet 1/1

RoHS Compliant

1	2	3	4	5	6	7	A
1	2	3	4	5	6	7	B
1	2	3	4	5	6	7	C
1	2	3	4	5	6	7	D
1	2	3	4	5	6	7	E
1	2	3	4	5	6	7	F
1	2	3	4	5	6	7	G
1	2	3	4	5	6	7	H