




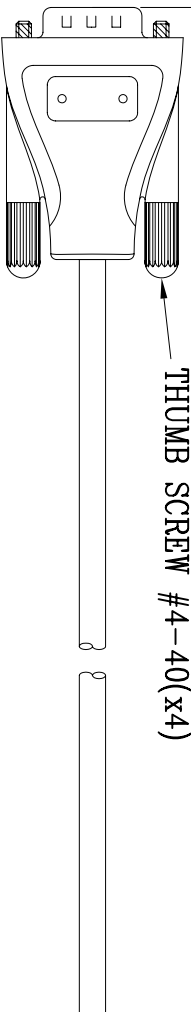


Signature	Revision History	Date	Rev.
	For Bulk Production	Dec:08,2007	01

DB 9/M  
PLASTIC: BLACK


2000±30

DB 9/M  
PLASTIC: BLACK



NOTES:

1. CABLE:NON-UL 28AWG(7/0.127 T.C)\*9C+DRAIN WIRE+AL-FOIL/MYLAR PVC JACKET;OD:Ø5.0±0.2mm,COLOR:BLACK.
2. CONNECTOR:  
P1&P2:DB9P MALE GOLD FLASH CONTACT,NICKEL PLATED SHELL.
3. HOOD:FIRST MOLD:MOLDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)  
SECOND MOLD:MOLDED TYPE,PVC 45P,COLOR:BLACK.
4. ELECTRICAL TEST:  
100% OPEN SHORT MIS WIRE TEST  
CONTACT RESISTANCE 3Ω MAX.  
INSULATION RESISTANCE 5MΩ MIN.
5. PACKING:SEE P-0039 PACKING DRAWING  
(BINDING SIZE MUST BE SMALLER THAN BLISTER)

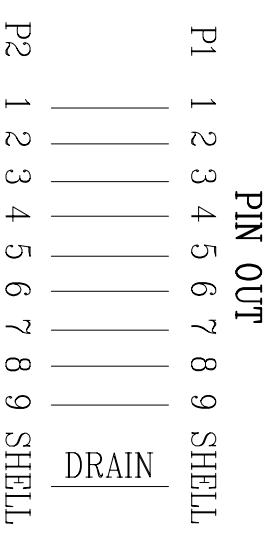

DK-113027

Date	Name
Dec:08,2007	N. Xu
Checked by	A.Dan
Dec:08,2007	
Approved by	T. Aulemann
Dec:08,2007	

**ASSMANN**  
Electronic GmbH

Part No. **DK-113027**

Title  
Modern cable Connect: D-Sub9  
2 COLOR MOLD WITH DIGITUS LOGO

Scale N/A  
Unit MM

Sheet 1/1

RoHS Compliant

A	1	2	3	4	5	6	7	A
B	1	2	3	4	5	6	7	B
C	1	2	3	4	5	6	7	C
D	1	2	3	4	5	6	7	D
E	1	2	3	4	5	6	7	E
F	1	2	3	4	5	6	7	F
G	1	2	3	4	5	6	7	G
H	1	2	3	4	5	6	7	H