



Signature	Revision History	Date	Rev.
	For Bulk Production	Dec.08.2007	01



DIN 6/M
PLASTIC:BLACK



2000±30

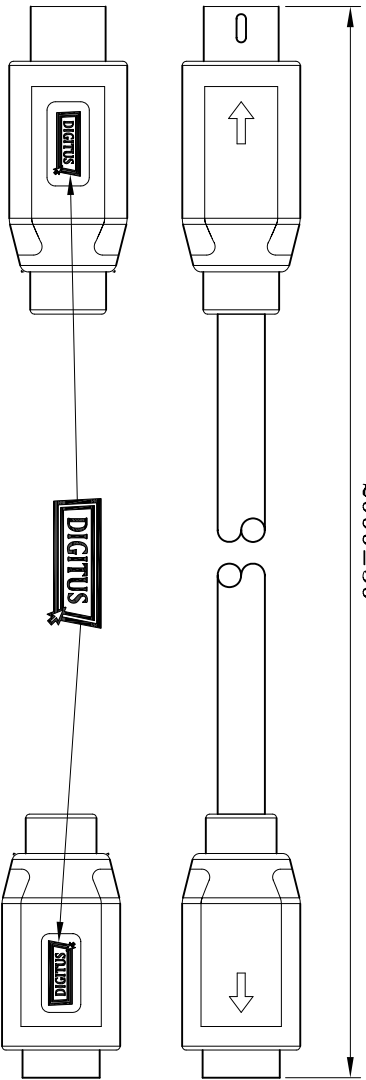

DIN 6/F
PLASTIC:BLACK

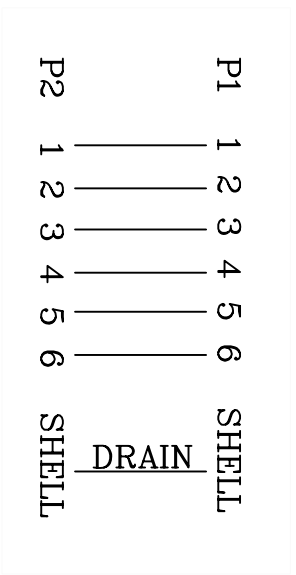

- NOTE:
- 1.CABLE:NON-UL 28AWG(7/0.127)T.C*6C INS:PVC+DRAIN WIRE
+AL-FOIL/MYLAR PVC JACKET COLOR:BLACK. OD:Ø5.0±0.2mm
 - 2.CONNECTOR: P1:MD6P MALE TINNED PLATED CONTACT, NICKEL PLATED SHELL.
P2:MD6P FEMALE TINNED PLATED CONTACT, NICKEL PLATED SHELL.
 - 3.HOOD:FIRST MOLD:MOULDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)
SECOND MOLD:MOULDED TYPE,PVC 45P COLOR:BLACK.
 - 4.ELECTRICAL TEST:100% OPEN SHORT MIS WIRE TEST.
CONTACT RESISTANCE 3 MAX.
INSULATION RESISTANCE 5M MIN.
 - 5.PACKING:SEE P-0039 PACKING DRAWING(BINDING SIZE MUST BE SMALLER THAN BLISTER)

	Date	Name
Drawn by	Dec.08.2007	N. Xu
Checked by	Dec.08.2007	A.Dan
Approved by	Dec.08.2007	T.Aulemann

Part No.	DK-103001
Title	PS/2 Extension cable, MiniDin 6 pin 2 COLOR MOLD WITH DIGITUS LOGO
Scale	N/A
Unit	MM
Sheet	1/1

RoHS Compliant

A	1	2	3	4	5	6	7	A
B	1	2	3	4	5	6	7	B
C	1	2	3	4	5	6	7	C
D	1	2	3	4	5	6	7	D
E	1	2	3	4	5	6	7	E
F	1	2	3	4	5	6	7	F
G	1	2	3	4	5	6	7	G
H	1	2	3	4	5	6	7	H

STR1407