

1

2

3






4

5

6

7


Signature	Revision History	Date	Rev.
Alex.Dan	For Bulk Production	Dec.20,2006	01

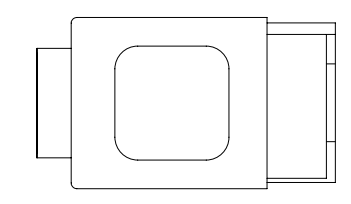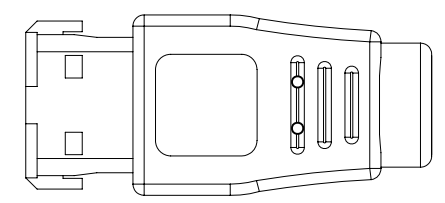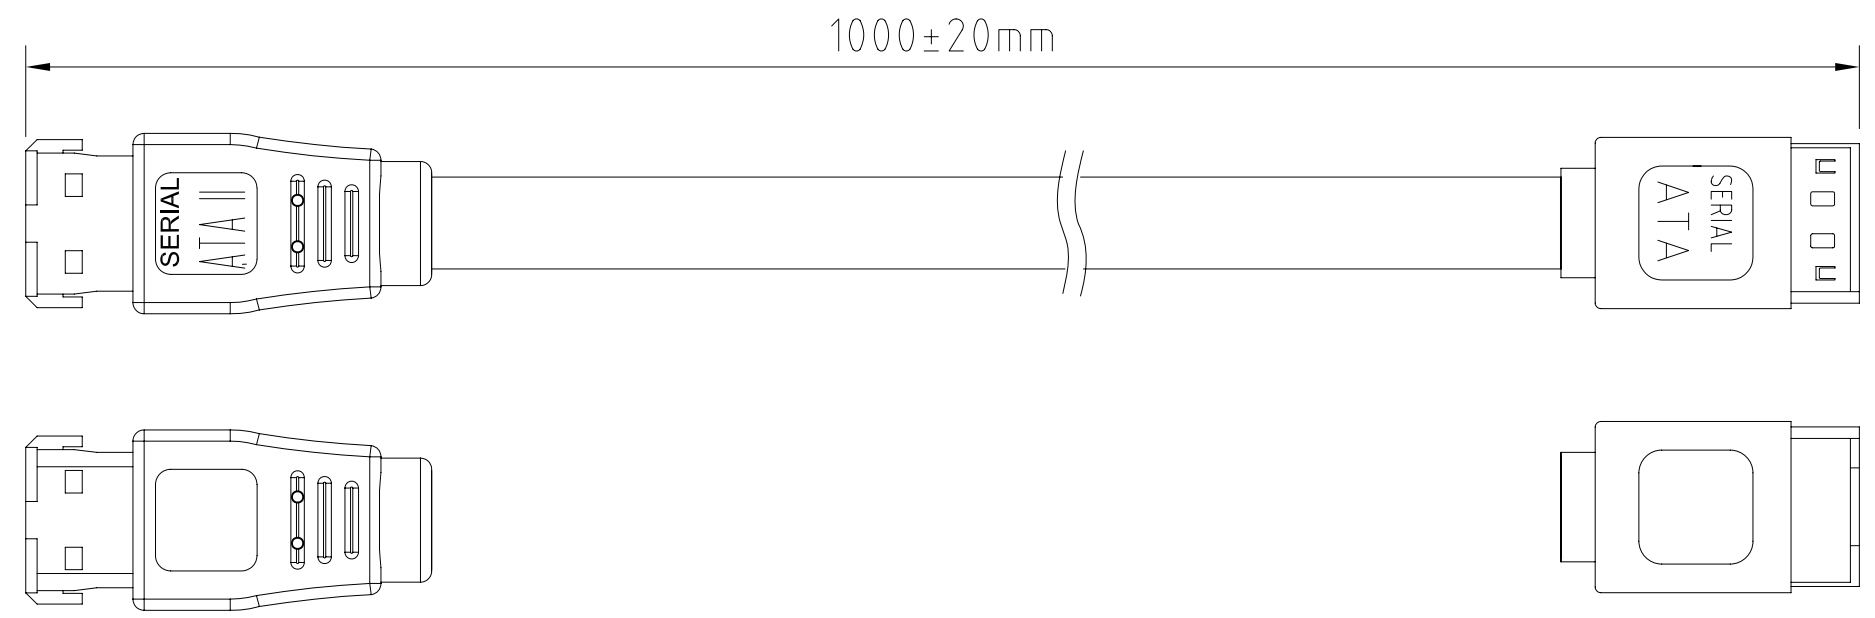

NOTE:

- 1.CABLE:UL2725 [26AWG(1/0.404)×2F INS:HD-PE ID:1.3×2.7+DRAIN WIRE
28AWG(1/0.32)×2C+AL/MY]×2C INNER JACKET:PVC OD:7.3×2.1mm
+AL/MY+BRAID(16/10/0.1)PVC JACKET, COLOR: BLACK,
OD:9.0×4.0mm, IMPEDANCE: 100 OHM.
- 2.CONNECTOR:P1:SATA II 7P RIVETING TYPE PBT BLACK G/F W/METAL SHELL
P2:SATA I 7P CRIMP TYPE PLASTIC BLACK G/F W/METAL SHELL .
- 3.SHIELD:COPPER-FOIL
- 4.HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK
- 5.TEST REQUEST:
 - 1. 100% OPEN SHORT & MIS WIRE TEST
 - 2. CONTACT RESISTANCE:3 ohm MAX
 - 3. INSULATION RESISTANCE:10M ohm MIN
 - 4. HI-POT DC 300V/0.01SEC
- 6.PACKING: SEE P-0039 REV.C PACKING DRAWING.

PIN ASSIGNMENT

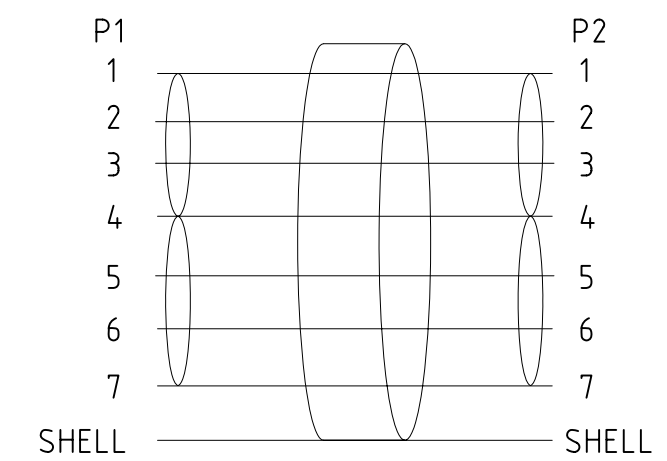

RoHS Compliant

EAN Code: 4016032193852

ST81407

	Date	Name
Drawn by	Dec.20,2006	Alex Dan
Checked by	Dec.20,2006	Norman Xu
Approved by		

Part No.
AK-ESATA-SATA100

ASSMANN
Electronic GmbH

Title.
Serial ATA adapter cable
(eSATA to SATA) with metal latch

Scale	N/A	Sheet
Unit	MM	1/1

1

2

3

4

5

6

7