


Signature	Date	Rev.
Norman Xu	Dec.20,2005	01

Revision History	Date	Rev.
For Bulk Production	Dec.20,2005	01

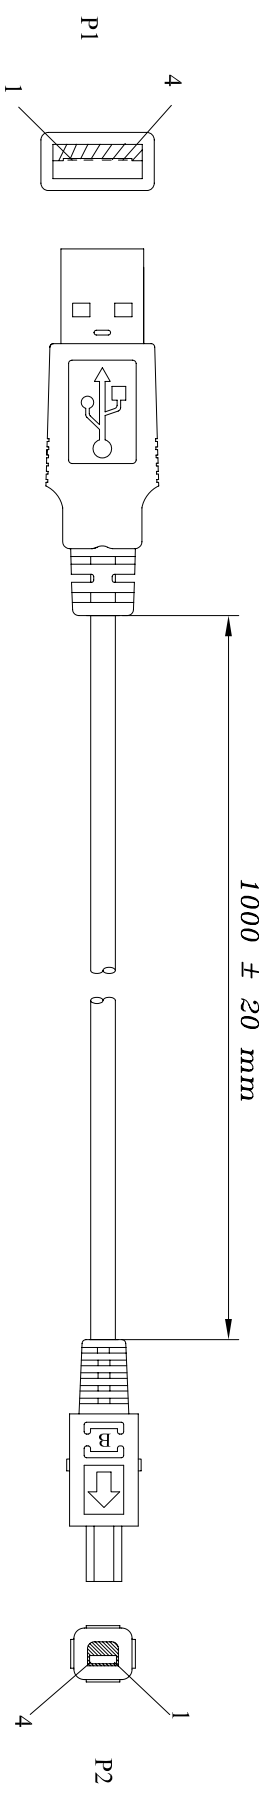

1 2 3 4 5 6 7

1000 ± 20 mm

NOTES:

1. CABLE: UL-2725 28AWG\*2C+28AWG\*1PR+AL-FOIL/MYLAR +SPIRAL PVC JACKET (90P) OD:3.5± 0.15mm COLOR:BLACK.

2.CONNECTORS:

P1: USB A TYPE MALE GOLD FLASH CONTACT NICKEL PLATED SHELL.  
P2: (MITSUMI)MINI USB 4P MALE EQUIVALENT (B TYPE)

3.HOOD: MOLDED TYPE,PVC 45P, COLOR:BLACK.

4.TEST REQUEST:

- <1>.100% OPEN SHORT & MIS WIRE TEST.
  - <2>.CONTACT RESISTANCE 3Ω MAX.
  - <3>.INSULATION RESISTANCE 20MΩ MIN.
- 5.PACKING:SEE P-0039 REV.C PACKING DRAWING  
PACKING TYPE: DB VP2  
(HANKING SIZE MUST BE SMALLER THAN PACKING)

P1	RED	1	_____	P2	WHITE	2	_____
	GREEN	3	_____		GREEN	3	_____
	BLACK	4	_____		BLACK	4	_____
	SHELL	_____	_____		SHELL	_____	_____

A B C D E F G H

1 2 3 4 5 6 7

RoHS Compliant

EAN Code:  
4016032082965

Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

Part No.	AK 670M-1
Title:	Mini USB Cable

**ASSMANN**  
Electronic GmbH

Scale	N/A	Sheet	1/1
Unit	MM		

STR1407

A B C D E F G H