



Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01

IEEEE1394 4P

PLASTIC:BLACK




1800±30mm

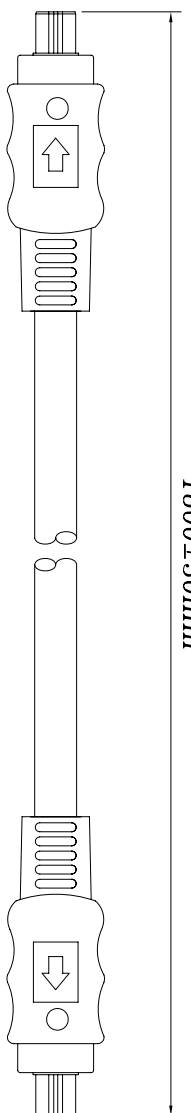

IEEEE1394 4P


PLASTIC:BLACK



1 2 3 4 5 6 7

NOTE:

- CABLE: [28AWG(7/0.127)T.C*1PAIR+AL/MYLAR+SPIRAL(66/0.08)]*2+FILLER+MYLAR*2+BRAID(90%)+PVC JACKET COLOR:MATT BLACK.
OD:6.0±0.15mm UL20276 IEEE 1394 CABLE
- P1&P2: IEEE1394 4PIN MALE GOLD PLATED 15u" CONTACT NICKEL PLATED SHELL.
- HOOD:P1&P2 MOLDED TYPE ,COLOR:MATT BLACK.
- TEST REQUESTED:
 - <1>.100% OPEN SHORT MIS WIRE TEST
 - <2>.CONTACT RESISTANCE 3 OHM MAX
 - <3>.INSULATION RESISTANCE 20M OHM MIN
- PACKING:SEE P-0039 REV.C PACKING DRAWING
- PACKING TYPE: DB VP3
(HANKING SIZE MUST BE SMALLER THAN PACKING)

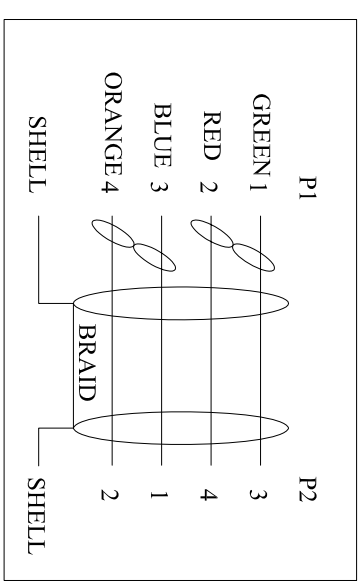

RoHS Compliant

EAN Code:
4016032051732

Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

ASSMANN
Electronic GmbH

Part No.
AK-1394-1844

Title:
1394 A 4PIN MALE TO 1394 A 4PIN MALE CABLE, 1.8M

Scale	N/A	Sheet
Unit	MM	1/1

H

G

F

E

D

C

B

A

1 2 3 4 5 6 7