Signature	Revision History	Date	Rev.
Alex.Dan	For Bulk Production	Dec.20,2005	01

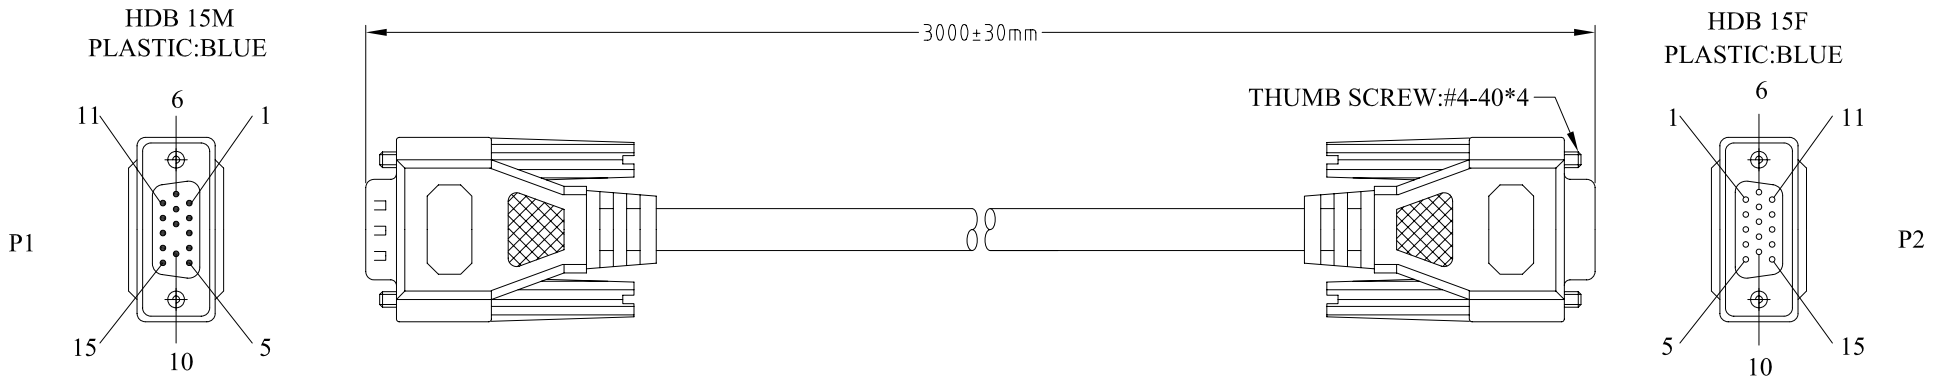

PIN OUT

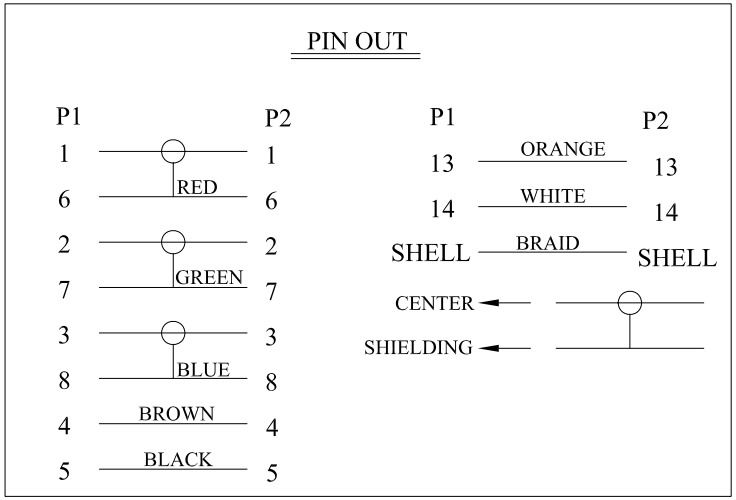

NOTES:

1. CABLE:28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE INNER
   JACKET:PVC OD:Ø2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)*4C+
   INSULATION:SR-PVC ID:Ø0.85± 0.05mm(UL-1061)+AL/MY+DRAIN
   WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC
   COLOR:BEIGE, OD:Ø 8.1± 0.15mm UL-2919
2. CONNECTOR:
   P1:HDB 15P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL
   (9TH PIN UNLOAD)
   P2:HDB 15P FEMALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL
3. SHIELD:COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID
4. HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.
5. ELECTRONIC TEST:
   <1>.100% OPEN SHORT & MIS WIRE TEST
   <2>.CONTACT RESISTANCE 3 OHMS MAX
   <3>.INSULATION RESISTANCE 20 M OHMS MIN
6. PACKING:SEE P-0039 REV.C PACKING DRAWING
   (HANKING SIZE MUST BE SMALLER THAN PACKING)
   PACKING TYPE: DB VP4.

RoHS Compliant

EAN Code: 4016032063490

	Date	Name
Drawn by	Dec.20,2005	Alex Dan
Checked by	Dec.20,2005	Norman Xu
Approved by		

ASSMANN Electronic GmbH

ST81407

Part No.

AK 3730 3M

Title.

PREMIUM VGA MONITOR EXTENSION CABLE

Scale	N/A	Sheet
Unit	MM	1/1