Signature	Revision History	Date	Rev.
Alex.Dan	For Bulk Production	Dec.20,2005	01

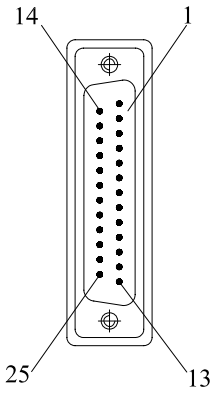

P1

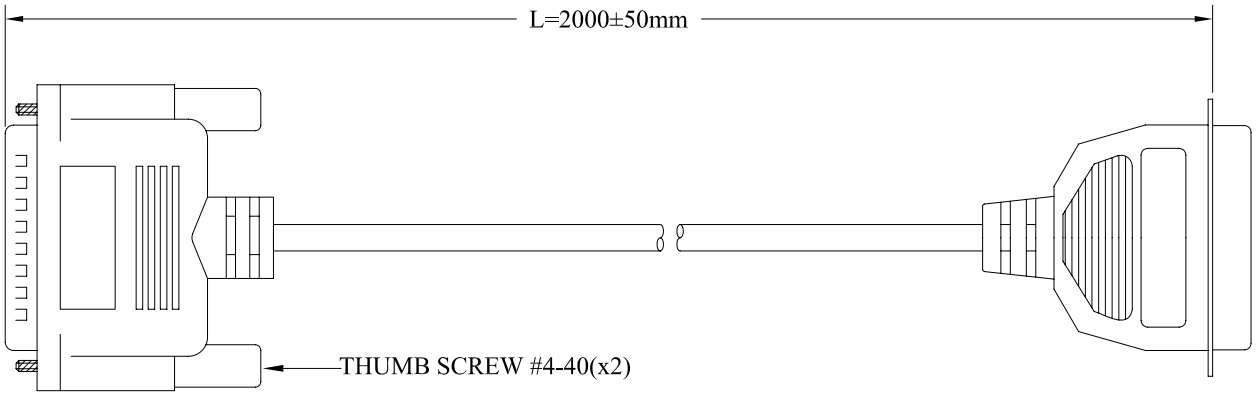

CN 36M
PLASTIC:BLUE



P2

NOTE :

1.CABLE:NON-UL 25C*28AWG(7/0.127)TINNED COPPER INS:PVC
+AL/MYLAR+DRAIN WIRE:26AWG(7/0.16)TINNED COPPER
JACKET:PVC COLOR:BEIGE,OD:7.0±0.2mm

2.CONNECTOR:
P1:DB 25P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL.
P2:CN 36P MALE,GOLD FLASH CONCTACT,NICKEL PLATED SHELL.

3.HOOD:MOLDED TYPE PVC 45P,COLOR:BEIGE.

4.TEST REQUEST:100% OPEN SHORT & MIS WIRE TEST,
CONTACT RESISTANCE 3 OHMS MAX
INSULATION RESISTANCE 20M OHMS MIN

5.PACKING:SEE P-0039 REV.C PACKING DRAWING
PACKING TYPE: DB VP4.
(HANKING SIZE MUST BE SMALLER THAN PACKING)

PIN OUT

P1	1	2	3	4	5	6	7	8	9	10	11	12	13	14
P2	1	2	3	4	5	6	7	8	9	10	11	12	13	14
	15	16	17	18	19	20	21	22	23	24	25	SHELL		
	32	31	36	33	19	21	23	25	27	29	30	SHELL		

RoHS Compliant

EAN Code: 4016032062622

	Date	Name
Drawn by	Dec.20,2005	Alex Dan
Checked by	Dec.20,2005	Norman Xu
Approved by		

ASSMANN Electronic GmbH

ST81407

Part No.

AK 108 2M

Title.

DB25M/CN 36M,2M

Scale	N/A	Sheet
Unit	MM	1/1