

1

2

3

4


5

6


7

Signature	Revision History	Date	Rev.
Alex Dan	For Bulk Production	Dec.20,2005	01

DB9P FEMALE
PLASTIC:BLUE




THUMB SCREW:#4-40*4

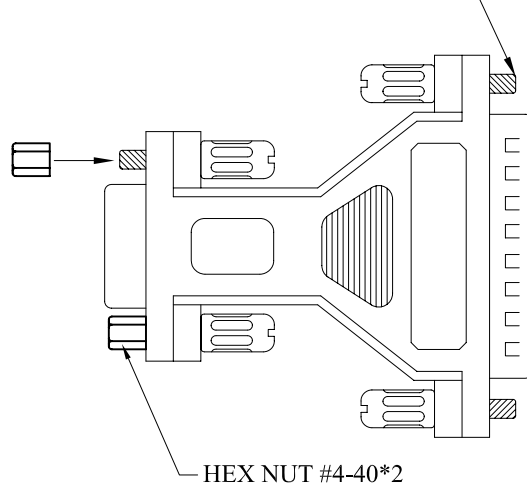

HEX NUT #4-40*2

DB25P MALE
PLASTIC:BLUE

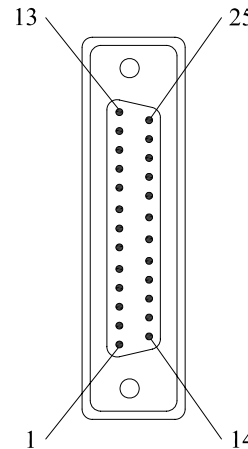

P2

PIN OUT	
P1	P2
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
SHELL	SHELL

NOTES:

- HOOK UP WIRE:28AWG(7/0.127)TINNED COPPER
- CONNECTOR
P1:DB9P FEMALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.
P2:DB25P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.
- HOOD:MOLDED TYPE, PVC 45P. COLOR:BEGIE.
- ELECTRICAL TEST:
(1)100% OPEN SHORT MIS WIRE TEST.
(2)CONTACT RESISTANCE 3 OHMS MAX.
(3)INSULATION RESISTANCE 20M OHMS MIN.
- PACKING:SEE P-0039 REV.C PACKING DRAWING
EAN CODE:4016032061021

RoHS Compliant

EAN Code:
4016032061021

	Date	Name	Part No. AB 914
Drawn by	Dec.20,2005	Alex Dan	
Checked by	Dec.20,2005	Norman Xu	
Approved by			Title. DB 9F/DB25M ADAPTOR

ASSMANN
Electronic GmbH

Scale	N/A	Sheet 1/1
Unit	MM	

ST81407

1

2

3

4

5

6

7