


Gigabit Ethernet Network Adapter 32-bit, 66/33MHz PCI 10/100/1000Mbps UTP

Features

- Comply with the IEEE 802.3, IEEE 802.3u, IEEE 802.3ab and IEEE 802.3x.
- Supports 32-bit, 66/33MHz PCI Local Bus Master for high speed operation of Rev. 2.2/2.1 specification.
- One RJ-45 connector supports 1000Mbps, 100Mbps or 10Mbps network speed and Auto-MDI/MDI-X.
- Plug-and-Play installation--auto-setup IRQ and I/O address.
- Supports IEEE 802.3x full-duplex flow control.
- Full-duplex design to double the performance to 20/200/2000Mbps.
- Supports Wake On LAN function.
- Supports IEEE 802.1Q VLAN tagging.

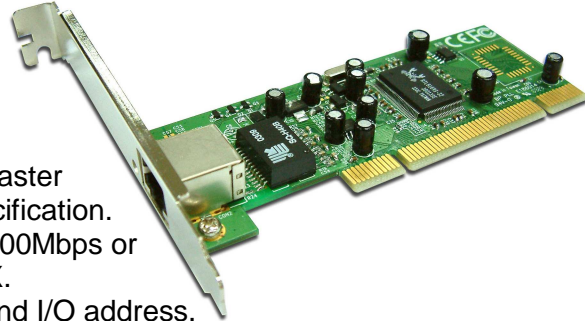

Product	32-bit Gigabit Ethernet Adapter
Chipset	Realtek RTL8169S-32 Single Chip
Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x
Bus Architecture	PCI V2.2/2.1, 32-bit, 66/33MHz
Network Power	UTP x 1 (Auto-MDI/MDI-X)
Network Drivers	Windows 98SE/Me/NT/2000/XP, Netware Server 5.x/6.x, Netware ODI for DOS, Unix, Linux and MAC
LED	Link/Activity
Dimension	120 x 45 mm (4.72 x 1.77 in.)
Temperature	32~131°F (0~55°C)
Humidity	10-95% (NonCondensing)
Certification	FCC Class B, CE Mark, C-Tick, VCCI

136477 / DN-1011 Gigabit PCI Network Adapter, 32-Bit