

1

2

3

4

5


6

7

Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01


IEEE1394 6PIN MALE
INSULATOR:BLACK

IEEE1394b 9PIN BILINGUAL MALE
INSULATOR:BLACK

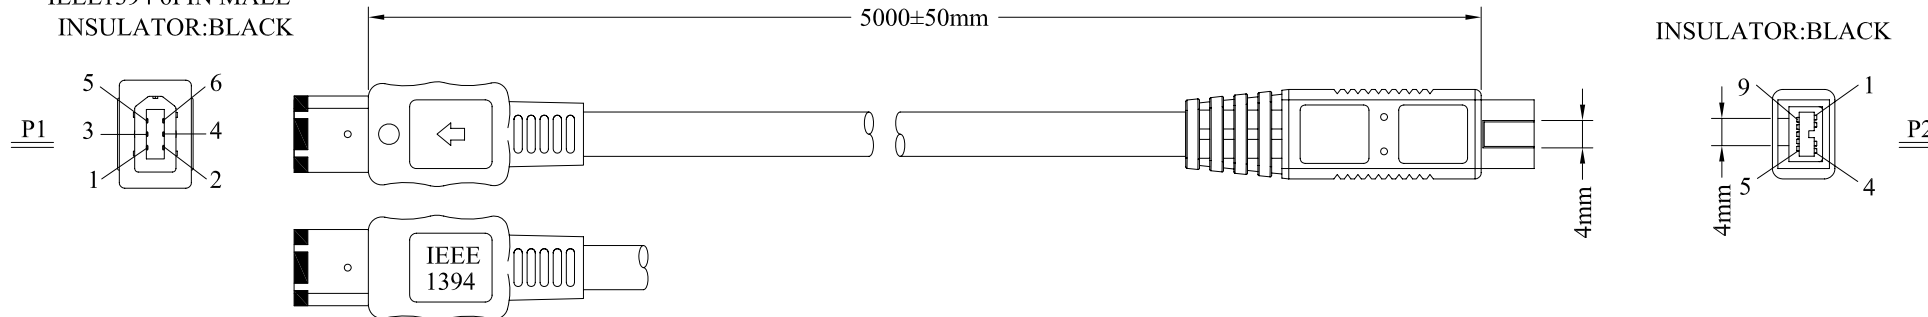

NOTE:

- CABLE: {[30AWG(7/0.103)*1PAIR+DRAIN WIRE(7/0.103)*2C+AL/MY+MY]*2C +26AWG(7/0.163)*2C+MY*1+AL/MY+85% BRAID(16/6/0.12)} TIN
30AWG INS:FO-SKIN ID:Ø0.9±0.01mm COLOR:RED&GREEN, BLUE&ORANGE
26AWG INS:SR-PVC ID:Ø1.0±0.07mm COLOR:WHITE&BLACK
PVC JACKET COLOR:BLACK, OD:Ø5.5±0.2mm
UL20276 IEEE1394 CABLE
- CONNECTOR:
P1: IEEE1394 6PIN MALE GOLD PLATED 15u" CONTACT, NICKEL PLATED SHELL
P2: IEEE1394b 9PIN BILINGUAL MALE GOLD PLATED 15u" CONTACT, NICKEL PLATED SHELL
- HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK.
- ELECTRICAL TEST:
(1)100% OPEN SHORT & MIS WIRE TEST
(2)CONTACT RESISTANCE 3 ohms MAX.
(3)INSULATION RESISTANCE 20M ohms MIN.
(4)HI-POT: DC 300V / 0.01 sec
- PACKING:SEE P-0039 REV.C PACKING DRAWING
PACKING TYPE: DB VP4.
(HANKING SIZE MUST BE SMALLER THAN PACKING)

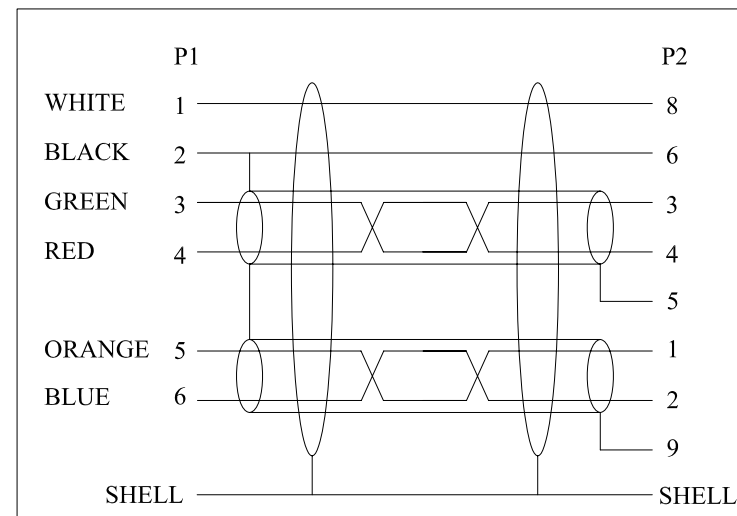

RoHS Compliant

EAN Code:
4016032142232

ST81407

	Date	Name	Part No. AK-1394B-506
Drawn by	Dec.20,2005	Norman Xu	
Checked by	Dec.20,2005	Alex Dan	
Approved by			Title. 1394 6PIN MALE - 1394B 9PIN BILINGUAL MALE CABLE
ASSMANN Electronic GmbH			
Scale	N/A	Sheet	1/1
Unit	MM		

1

2

3

4

5

6

7