



Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01

3000 ± 50 mm

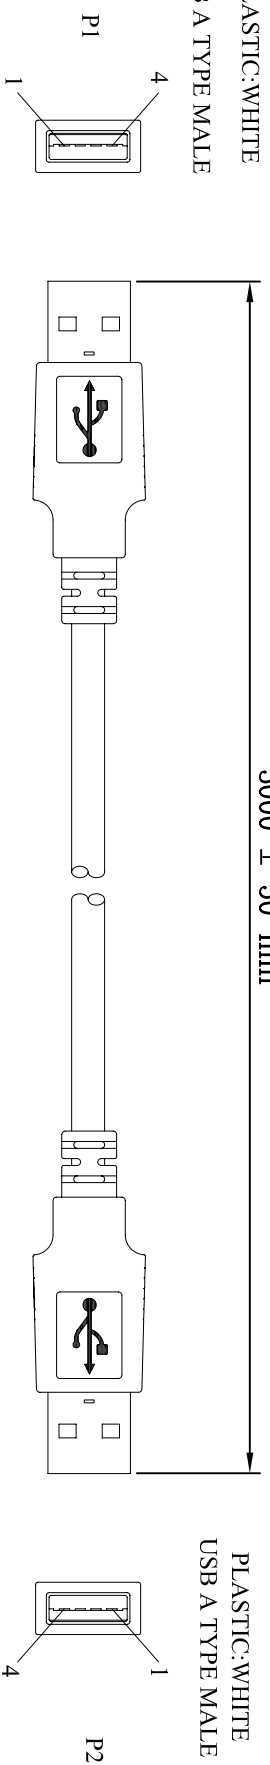

NOTE:
 1.CABLE: UL-2725 28AWG(7/0.127)TC*1P INS:PE COLOR:WHITE, GREEN
 +2C*24AWG(7/0.203)TC INS:SR-PVC COLOR:RED, BLACK+AL/MYLAR
 +BRAID SHIELD (65%) PVC JACKET OD:4.7± 0.15mm
 COLOR:BEIGE

- 2.CONNECTOR:
 P1&P2:USB A TYPE MALE GOLD FLASH CONTACT, NICKELPLATED SHELL.
 3.HOOD: MOLDED TYPE,PVC 45P,COLOR:BEIGE.
 4.ELECTRICAL TEST:
 <1>.100% OPEN SHORT & MIS WIRE TEST
 <2>.CONTACT RESISTANCE 3 OHM MAX
 <3>.INSULATION RESISTANCE 20M OHM MIN
 5.PACKING:SEE P-0039 REV.C PACKING DRAWING
 PACKING TYPE: DB VP3
 (HANKING SIZE MUST BE SMALLER THAN PACKING)

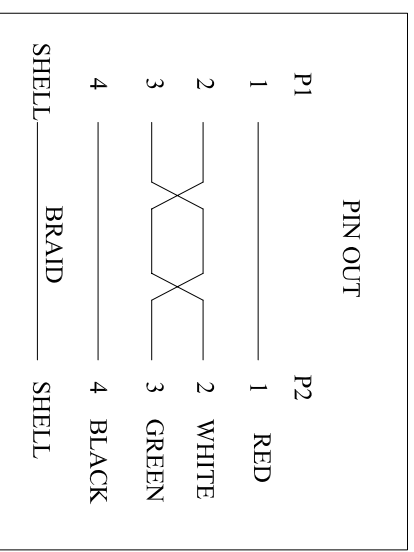

RoHS Compliant

EAN Code:
4016032083573

Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

Part No.	AK 670-3
Title:	USB AM TO USB AM CABLE: GREY 3.0M

STS1407

Scale	N/A	Sheet	1/1
Unit	MM		

1	2	3	4	5	6	7	
H	G	F	E	D	C	B	A