


Signature	Revision History	Date	Rev.
N.Xu	For Bulk Production	Dec.08.2007	01

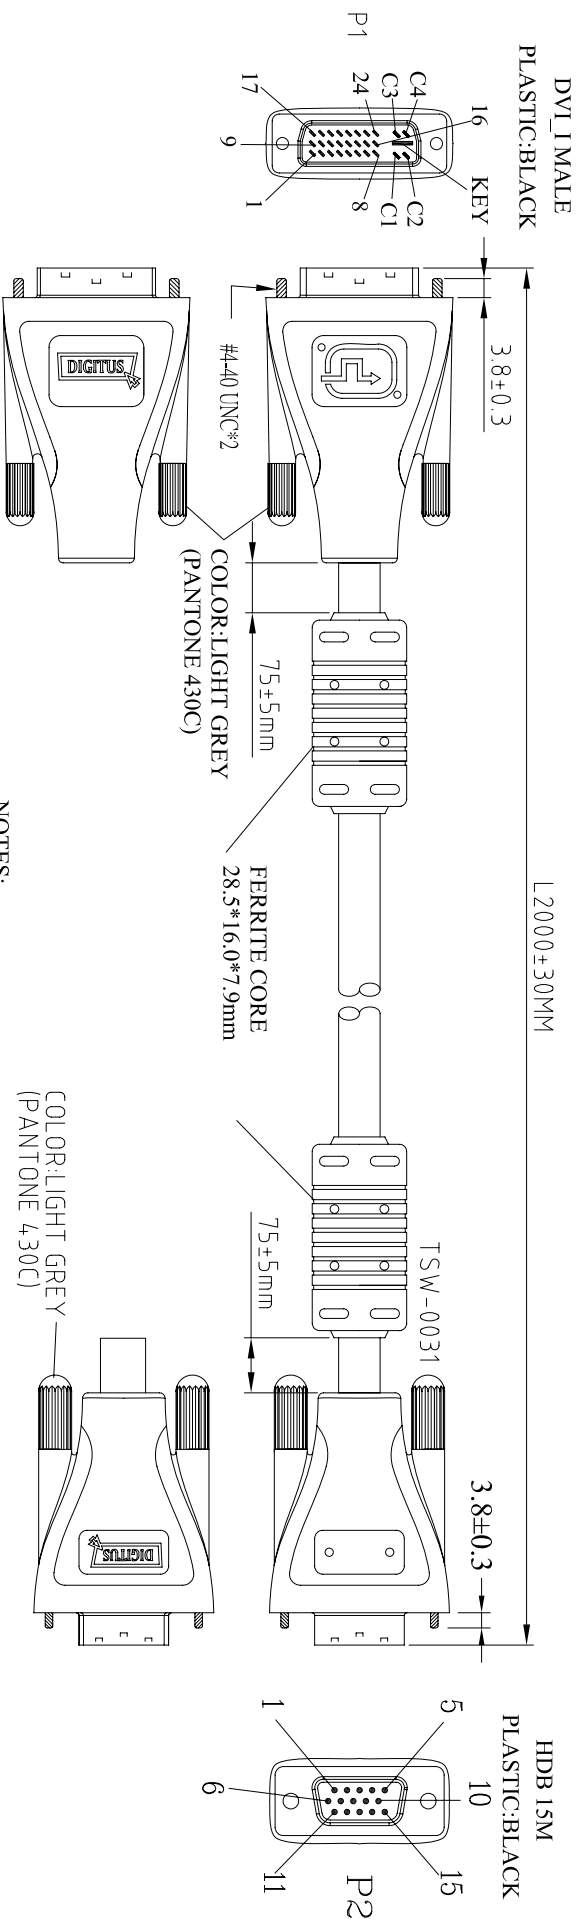

NOTES:

1. CABLE: 30AWG(7/0.102)COAXIALX3C+28AWG(7/0.127)x5C+28AWG(7/0.127)*1PAIR+AL/MYLAR+DRAIN WIRE+BRAID SHIELD+JACKET:PVC OD:7.0±0.15mm COLOR:BLACK UL 20276 APPROVED.
2. CONNECTOR:
 - P1: DVI 29P: 24P+4+KEY DIGITAL/ANALOG GOLD FLASH CONTACT NICKEL PLATED SHELL
 - P2: HDB 15P MALE GOLD FLASH CONTACT NICKEL PLATED SHELL
- 3.SHEILD: P1&P2 COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE SHIELDING
- 4.HOOD: FIRST MOLD:MOLDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOLDED TYPE,PVC 45P COLOR:BLACK.
- 5.PACKING: SEE P-0039 PACKING DRAWING (BINDING SIZE MUST BE SMALLER THAN BLISTER)

WIRE CONNECTION

P1	WIRE COLOR	P2
6	_____	15
7	_____	12
8	_____	14
14,16	_____	9
15	_____	5,10
C1	_____	1
KEY	_____	6
C2	_____	2
KEY	_____	7
C3	_____	3
KEY	_____	8
C4	_____	13
SHELL	BRAID	SHELL

RoHS Compliant

Date	Name	Part No.
Dec.08.2007	N. Xu	DK-110034
Dec.08.2007	A.Dan	
Dec.08.2007	T.Aulemann	

ASSMANN
Electronic GmbH

Title
DVI 24+5 MALE TO VGA MALE CABLE
2COLOR MOLD WITH DIGITUS LOGO

Scale Unit Sheet
N/A MM 1/1

1	2	3	4	5	6	7
1	2	3	4	5	6	7

STR1407