


Signature	Revision History	Date	Rev.
N.Xu	For Bulk Production	Dec:08,2007	01

1 2 3 4 5 6 7

USB A TYPE MALE


2000±30MM

MINI USB 5P MALE

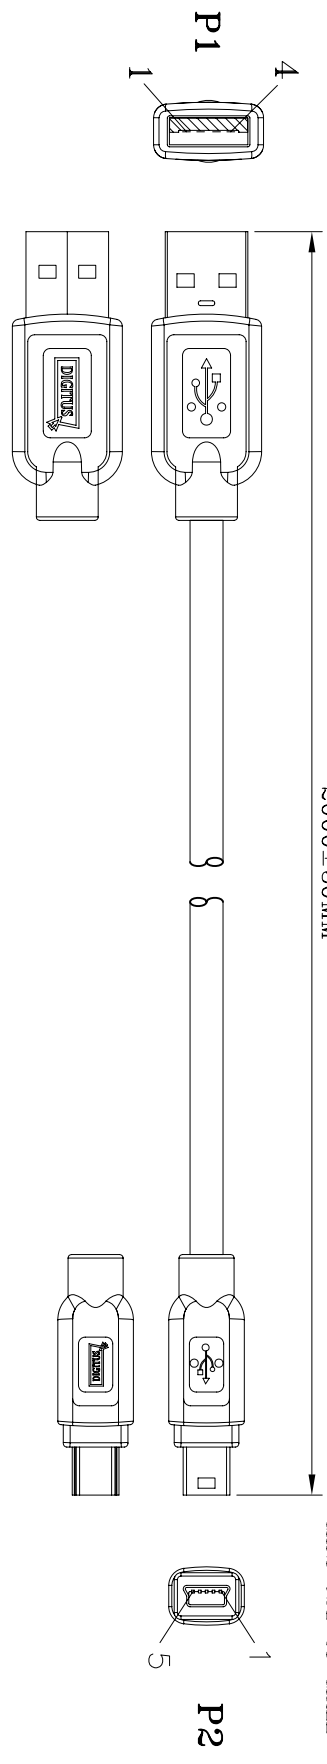

NOTE:

- 1. CABLE: UL-2725 [28AWG(7/0.127TC)]*1PAIR INS:HD-PE+24AWG(7/0.203TC)*2C INS:SR-PVC +AL-FOIL/MYLAR+DRAIN WIRE+BRAID(50%)TIN
PVC JACKET OD:Ø4.7±0.15mm COLOR:BLACK.
- 2. CONNECTOR:
- 3. HOOD:FIRST MOLD:MOULDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)
SECOND MOLD:MOULDED TYPE,PVC 45P COLOR:BLACK.
- 4. ELECTRICAL TEST:
- 5. PACKING:SEE P-0039 PACKING DRAWING

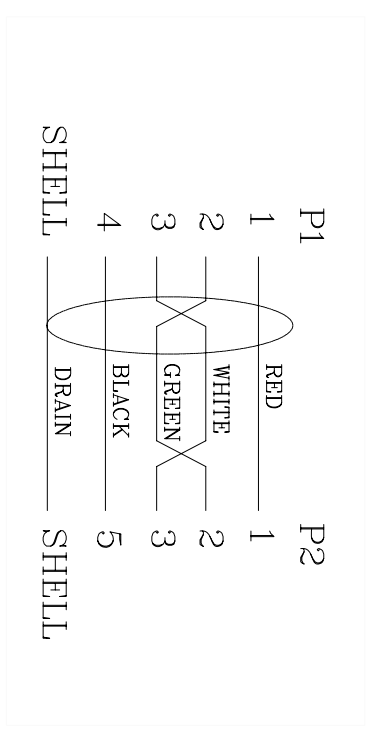

- <1>.100% OPEN SHORT & MIS WIRE TEST.
- <2>.CONTACT RESISTANCE 3 OHM MAX.
- <3>.INSULATION RESISTANCE 10M OHM MIN.
- (BINDING SIZE MUST BE SMALLER THAN BLISTER)

Date	Name	Part No.
Dec:08,2007	N. Xu	DK-112025
Checked by	A.Dan	
Approved by	T.Aulemann	

ASSMANN
Electronic GmbH

Title		Scale	Sheet
USB A(M)-MINI USB 5P(M) CABLE 2 COLOR MOLD WITH DIGITUS LOGO		N/A	1/1
Unit		MM	

RoHS Compliant

1 2 3 4 5 6 7

H

G

F

E

D

C

B

A