


Signature	Revision History	Date	Rev.
N.Xu	For Bulk Production	Dec.08.2007	01


USB A TYPE MALE
5000±50MM

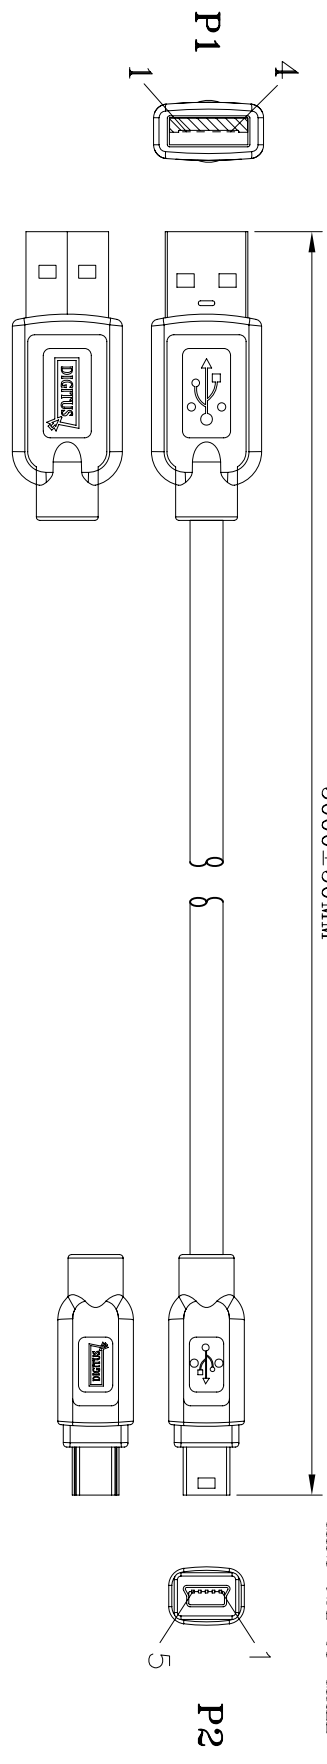

D

NOTE:

- 1.CABLE: UL-2725 [28AWG(7/0.127TC)]*1PAIR INS:HD-PE+24AWG(7/0.203TC)*2C INS:SR-PVC +AL-FOIL/MYLAR+DRAIN WIRE+BRAID(50%)TTIN
PVC JACKET OD:Ø4.7±0.15mm COLOR:BLACK.
- 2.CONNECTOR:
- P1:USB A TYPE MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.
- P2:MINI USB B TYPE 5P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.
- 3.HOOD:FIRST MOLD:MOLDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)
SECOND MOLD:MOLDED TYPE,PVC 45P COLOR:BLACK.
- 4.ELECTRICAL TEST:
- <1>.100% OPEN SHORT & MIS WIRE TEST.
- <2>.CONTACT RESISTANCE 3 OHM MAX.
- <3>.INSULATION RESISTANCE 10M OHM MIN.
- 5.PACKING:SEE P-0039 PACKING DRAWING
(BINDING SIZE MUST BE SMALLER THAN BLISTER)

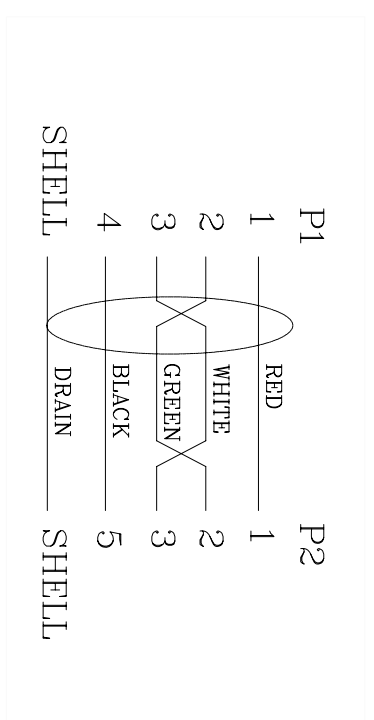

G

Part No.

DK-112027

Drawn by	Dec.08.2007	N. Xu
Checked by	Dec.08.2007	ALDan
Approved by	Dec.08.2007	T.Aulemann

H

Title

USB A(M)-MINI USB 5P(M) CABLE
2 COLOR MOLD WITH DIGITUS LOGO

ASSMANN
Electronic GmbH

Scale	N/A	Sheet	1/1
Unit	MM		

RoHS Compliant

1

2

3

4

5

6

7

H

STR1407