



Signature	Revision History	Date	Rev.
	For Bulk Production	Dec:08,2007	01

1 2 3 4 5 6 7

DB 25/M
PLASTIC:BLACK

2000±30

CN 36/M
PLASTIC:BLACK

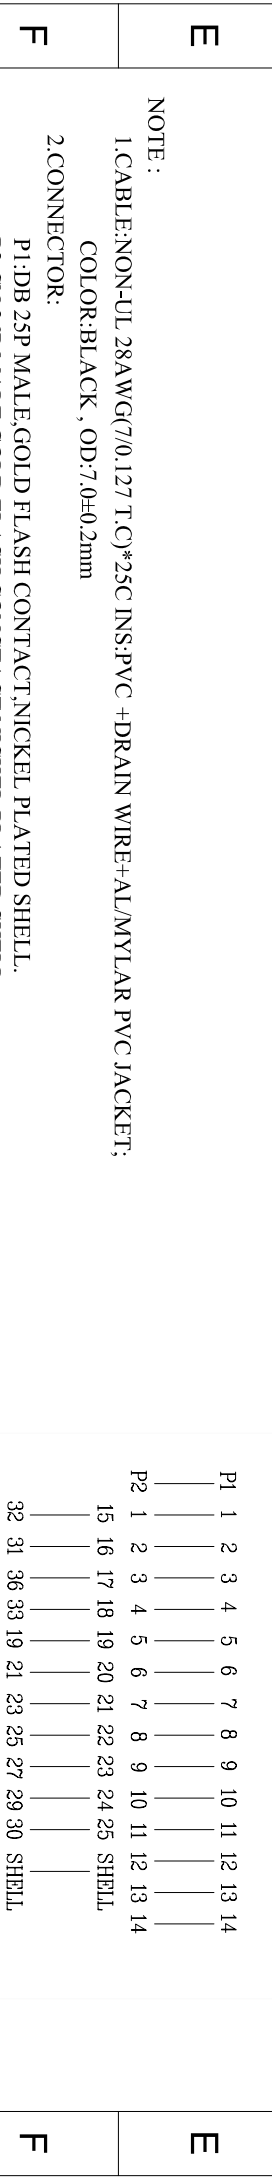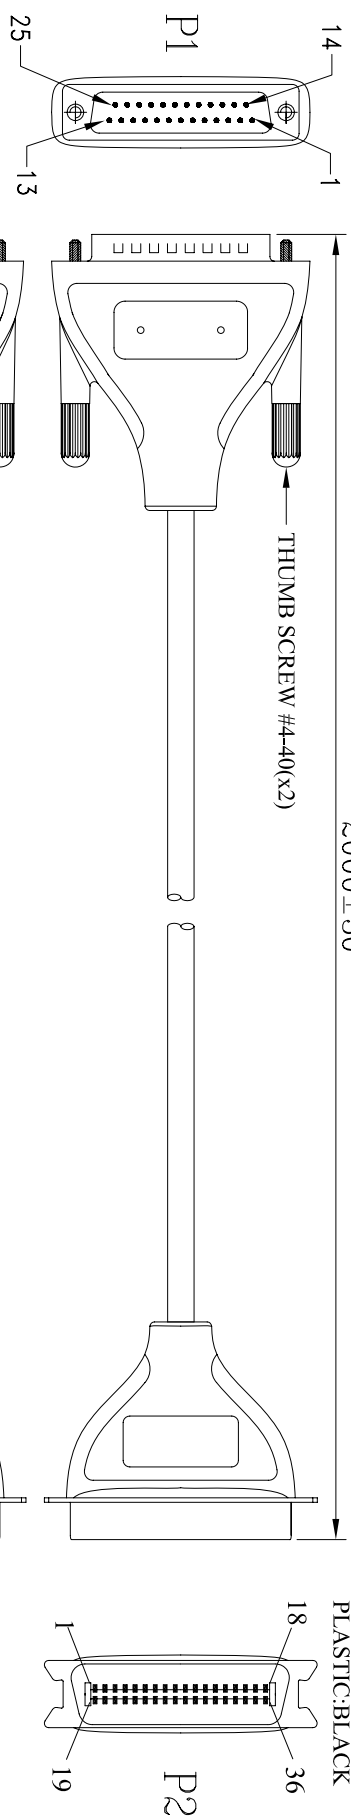

NOTE:

1.CABLE:NON-UL 28AWG(7/0.127 T.C)*25C INS:PVC +DRAIN WIRE+AL/MYLAR PVC JACKET;
COLOR:BLACK , OD:7.0±0.2mm

2.CONNECTOR:
P1:DB 25P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL.
P2:CN 36P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL.
3.HOOD:FIRST MOLD:MOLEDDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)
SECOND MOLD:MOLEDDED TYPE,PVC 45P COLOR:BLACK.
4.TEST REQUEST:100% OPEN SHORT & MIS WIRE TEST,
CONTACT RESISTANCE 3 OHMS MAX
INSULATION RESISTANCE 5M OHMS MIN
5.PACKING:SEE P-0039 PACKING DRAWING
(BINDING SIZE MUST BE SMALLER THAN BLISTER)

1	2	3	4	5	6	7
RoHS Compliant				S181407		
ASSMANN Electronic GmbH				Part No. DK-113001		
Title Print cable, Connect-D-Sub 25-Centl 36, 2 COLOR MOLD WITH DIGITUS LOGO				Scale N/A		
Date Dec:08,2007				Name N. Xu		
Checked by Dec:08,2007				A.Dan		
Approved by Dec:08,2007				T.Aulemann		
Unit MM				Sheet 1/1		