
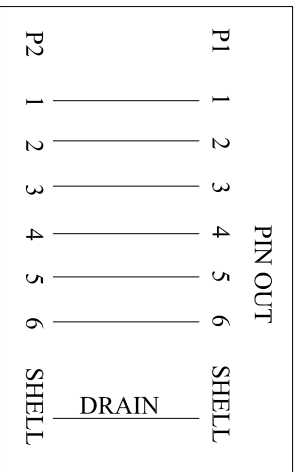


Signature	Date	Rev.
Alex Dan	Dec.20,2005	01

Revision History	Date	Rev.
For Bulk Production	Dec.20,2005	01

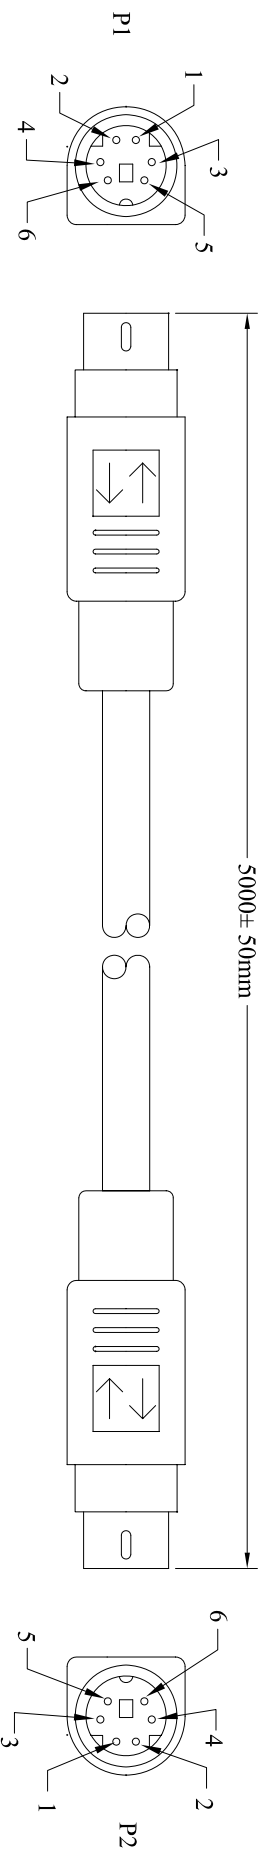

NOTES:

- CABLE:NON-UL 28AWG(7/0.127)TC*6C INS.:PVC+DRAIN WIRE+ AL-FOIL PVC JACKET COLOR:BEIGE.
OD:Ø5.0± 0.2mm
- CONNECTOR:
P1&P2:MD6P MALE TINNED PLATED CONTACT, NICKEL PLATED SHELL.
- HOOD:MOLDED TYPE, PVC 45P,COLOR:BEIGE.
- ELECTRICAL TEST:<1>100% OPEN SHORT & MIS WIRE TEST.
<2>CONTACT RESISTANCE 3 Ohms MAX.
<3>INSULATION RESISTANCE 20M Ohms MIN.
- PACKING:SEE P-0039 REV.C PACKING DRAWING
(HANKING SIZE MUST BE SMALLER THAN PACKING)
PACKING TYPE: DB VP4.

Drawn by	Dec.20,2005	Alex Dan
Checked by	Dec.20,2005	Norman Xu
Approved by		

Part No.	AK 679 5M
Title.	

RoHS Compliant

EAN Code:
4016032064541

STS1407

ASSMANN
Electronic GmbH

Title.		MD6/M - MD6/M CABLE	
Scale	N/A	Sheet	1/1
Unit	MM		

1	2	3	4	5	6	7	
A	B	C	D	E	F	G	H