


Signature	Revision History	Date	Rev.
	For Bulk Production	Dec:08,2007	01

DB 25/M  
PLASTIC:BLACK


2000±30

DB 25/M  
PLASTIC:BLACK

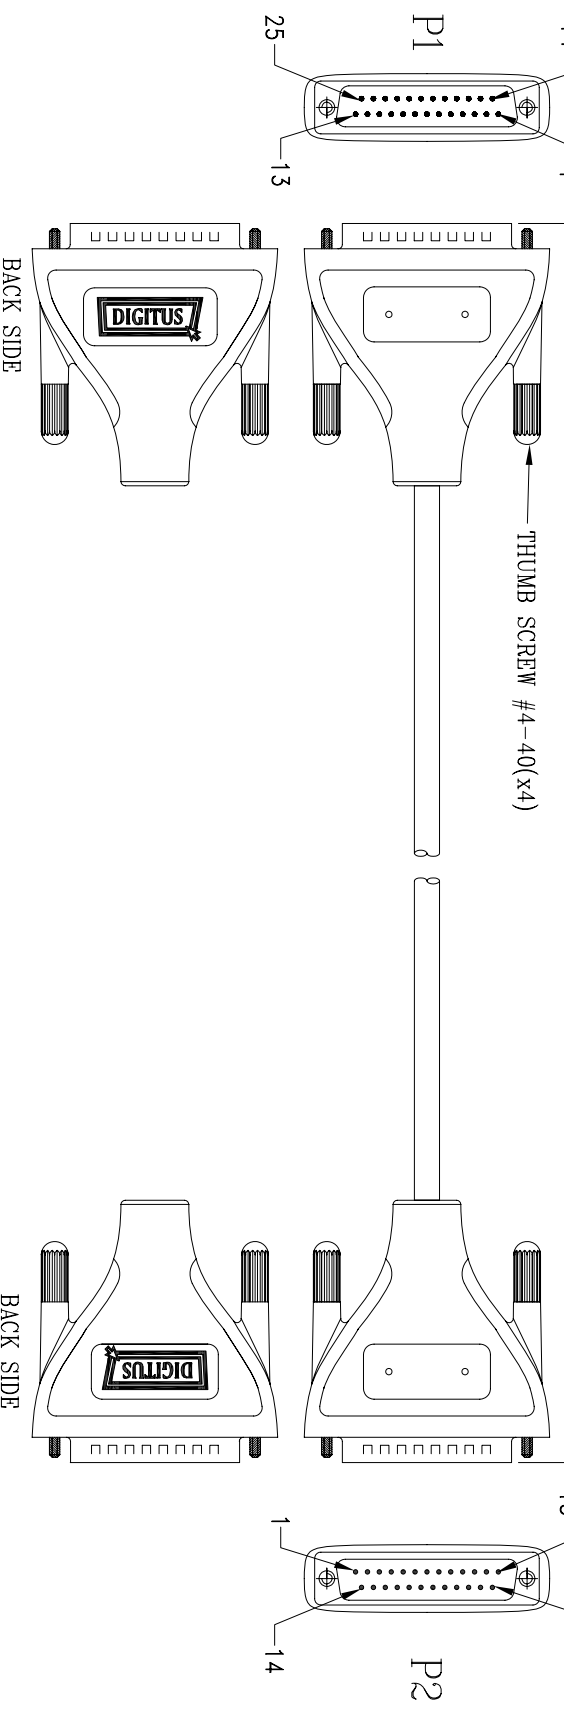

**NOTE :**

- 1.CABLE:NON-LUL 28AWG(7/0.127 T.C)\*25C INS:PVC+DRAIN WIRE  
+AL-FOIL/MYLAR PVC JACKET; OD:Ø7.0±0.2mm COLOR:BLACK.
- 2.CONNECTOR:  
P1:DB 25P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL.  
P2:DB 25P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL.
- 3.HOOD: FIRST MOLD:MOLEDDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)  
SECOND MOLD:MOLEDDED TYPE,PVC 45P COLOR:BLACK.
- 4.TEST REQUEST:100% OPEN SHORT & MIS WIRE TEST,  
CONTACT RESISTANCE 3 OHMS MAX  
INSULATION RESISTANCE 5M OHMS MIN
- 5.PACKING:SEE P-0039 PACKING DRAWING  
(BINDING SIZE MUST BE SMALLER THAN BLISTER)

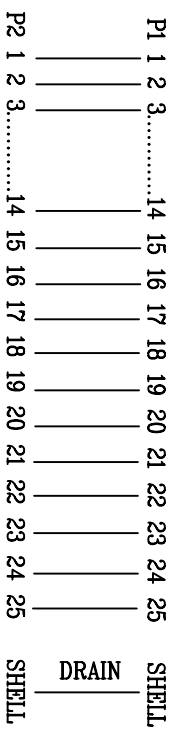

	Date	Name
Drawn by	Dec:08,2007	N. Xu
Checked by	Dec:08,2007	A.Dan
Approved by	Dec:08,2007	T.Aulemann

Part No.	<b>DK-113008</b>
Title	Printer cable, Connect, D-Sub 25 2 COLOR MOLD WITH DIGITUS LOGO
Scale	N/A
Unit	MM
Sheet	1/1

**RoHS Compliant**

1	2	3	4	5	6	7
A	B	C	D	E	F	G
H	H	H	H	H	H	H