




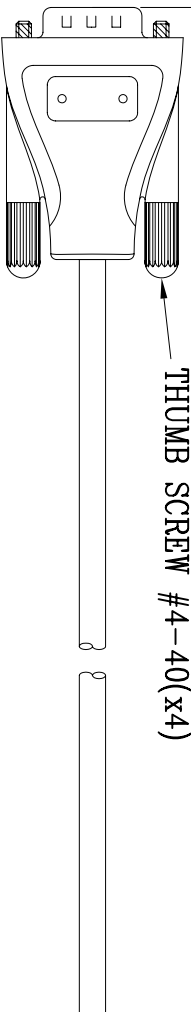


Signature	Revision History	Date	Rev.
	For Bulk Production	Dec:08,2007	01

DB 9/M
PLASTIC: BLACK

3000±30


DB 9/M
PLASTIC: BLACK



NOTES:

1. CABLE:NON-UL 28AWG(7/0.127 T.C)*9C+DRAIN WIRE+AL-FOIL/MYLAR PVC JACKET;OD:Ø5.0±0.2mm,COLOR:BLACK.
2. CONNECTOR:
P1&P2:DB9P MALE GOLD FLASH CONTACT,NICKEL PLATED SHELL.
3. HOOD:FIRST MOLD:MOLDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)
SECOND MOLD:MOLDED TYPE,PVC 45P,COLOR:BLACK.
4. ELECTRICAL TEST:
100% OPEN SHORT MIS WIRE TEST
CONTACT RESISTANCE 3 Ω MAX.
INSULATION RESISTANCE 5M Ω MIN.
5. PACKING:SEE P-0039 PACKING DRAWING
(BINDING SIZE MUST BE SMALLER THAN BLISTER)

PIN OUT

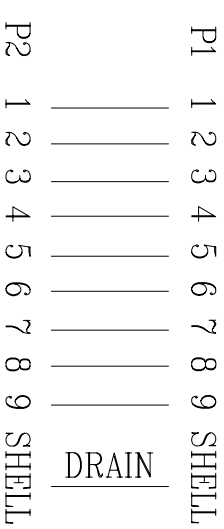

DRAIN

1	2	3	4	5	6	7	
A	B	C	D	E	F	G	H

RoHS Compliant

S181407

Date	Name
Dec:08,2007	N. Xu
Checked by	A.Dan
Dec:08,2007	
Approved by	T. Aulemann
Dec:08,2007	

Part No.	DK-113028
Title	Modern cable Connect: D-Sub9 2 COLOR MOLD WITH DIGITUS LOGO
Scale	N/A
Unit	MM
Sheet	1/1

ASSMANN
Electronic GmbH