



Signature	Revision History	Date	Rev.
N.Xu	For Bulk Production	Dec.08.2007	01

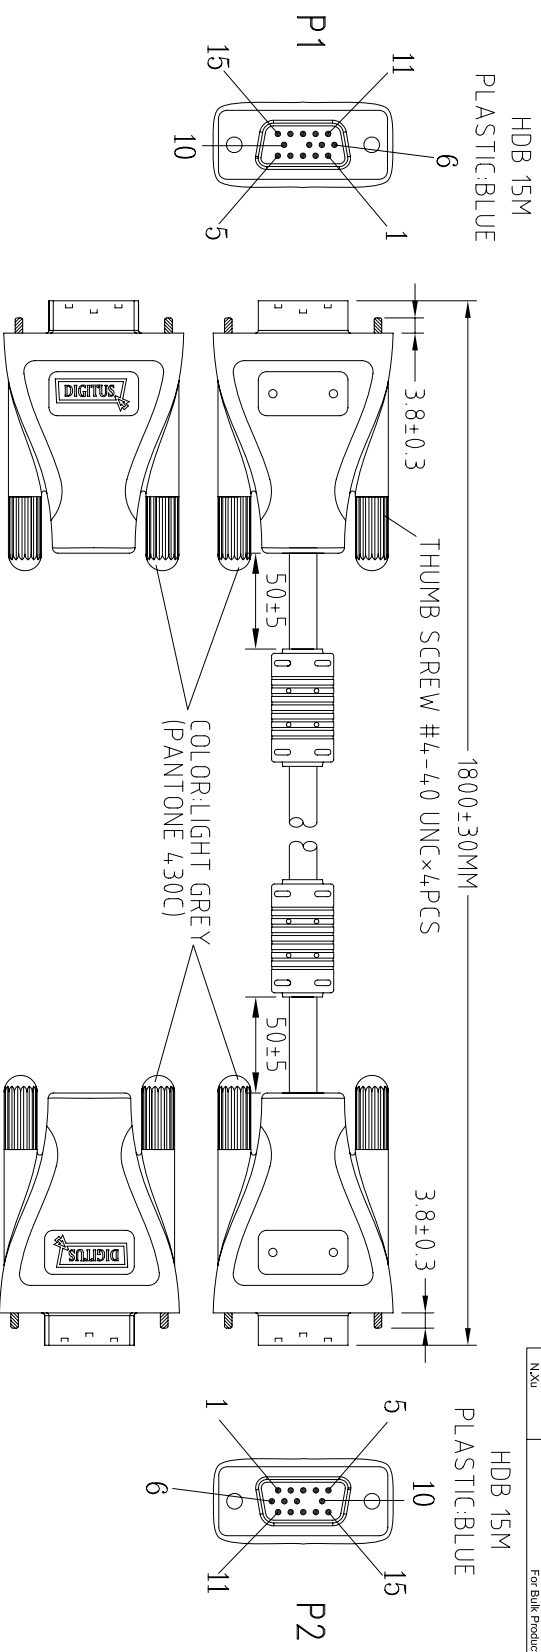

- NOTE:
- 1.CABLE:UL2919 28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INS:FO-PE SPIRAL,INNER JACKET:PVC OD:Ø2.5±0.1mm(UL-1354)+28AWG (7/0.127 T.C)*7C+INS:SR-PVC ID:Ø0.9±0.05mm(UL-1061)+AL/MY+DRAIN WIRE: 26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC COLOR: BLACK, OD:Ø8.5±0.15mm.
 - 2.CONNECTOR: P1&P2:HDB 15P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL. 9TH PINS EMPTY.
 - 3.FERRITE CORE:17.5*28.5*9.5mm.
 - 4.SHIELD: COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID.
 - 5.HOOD:FIRST MOLD:MOULDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOULDED TYPE,PVC 45P COLOR:BLACK.
 - 6.PACKING:SEE P-0039 PACKING DRAWING. (BINDING SIZE MUST BE SMALLER THAN BLISTER)

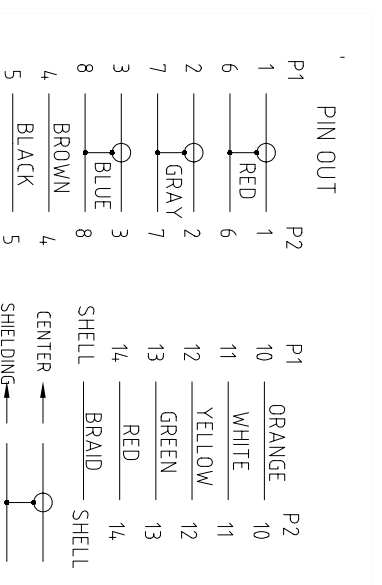

Part No.
DK-113043

Date	Name
Dec.08.2007	N. Xu
Dec.08.2007	ALDan
Dec.08.2007	T.Aulemann

Approved by
Dec.08.2007

ASSMANN
Electronic GmbH

Title
MONITOR CONNECTION CABLE VGA MALE TO MALE
2 COLORS MOLD WITH DIGITUS LOGO

Scale
Unit

N/A
MM

Sheet
1/1

RoHS Compliant

1	2	3	4	5	6	7
H	G	F	E	D	C	B
1	2	3	4	5	6	7
H	G	F	E	D	C	B