



Signature	Revision History	Date	Rev.
	For Bulk Production	Dec:08,2007	01

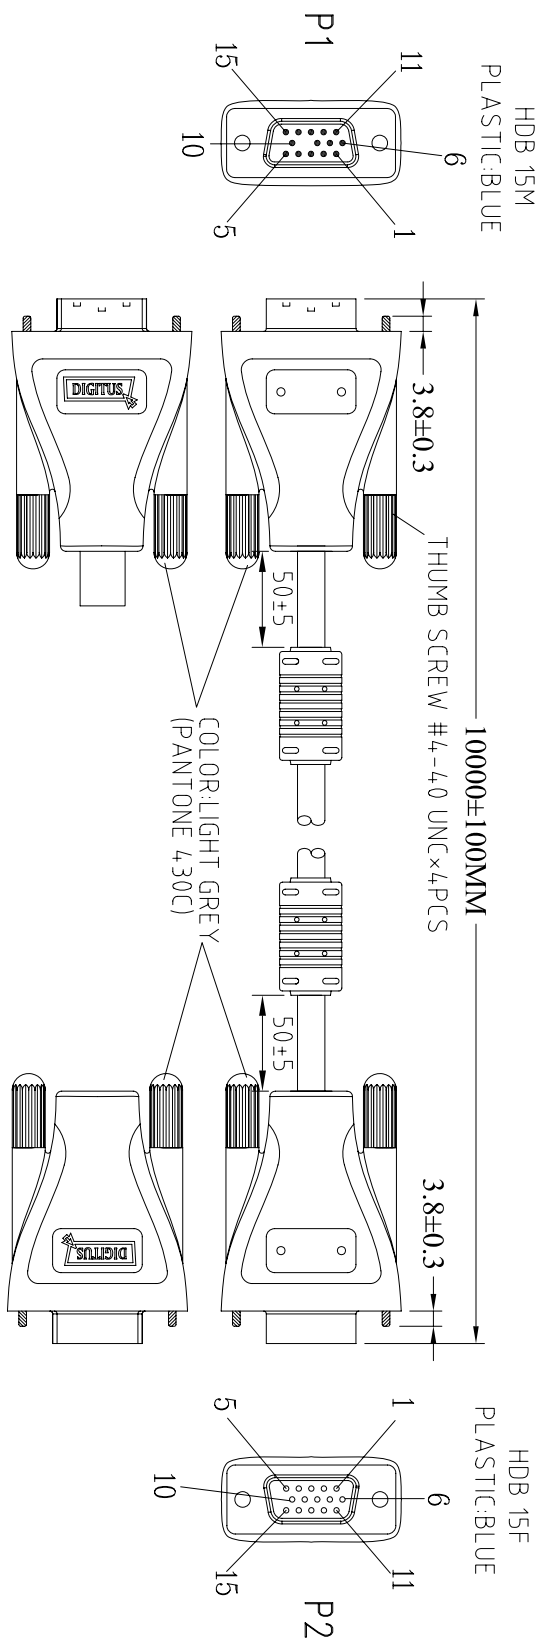

- NOTE:**
- CABLE:28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE+SPIRAL INNER JACKET:PVC OD: 2.5±0.1mm(UL-1354)+28AWG(7/0.127 T.C)
*7C+INSULATION:SR-PVC IDØ 0.9±0.05mm(UL-1061)+AL/MYLAR+DRAIN WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC COLOR:BLACK, OD: 8.5±0.15mm UL-2919 APPROVED.
 - CONNECTOR:
P1:HDB 15P MALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL (THE 9TH PIN UNLOAD)
P2:HDB 15P FEMALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL
 - FERRITE CORE:17.5*28.5*9.5mm
 - SHIELD:COPPER-FOIL 360°SOLDERED TO CONNECTOR SHELL & CABLE BRAID
 - HOOD:FIRST MOLD:MOLDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOLDED TYPE,PVC 45P COLOR:BLACK..
 - ELECTRICAL TEST<1>>.100% OPEN SHORT & MIS WIRE TEST <2>.CONTACT RESISTANCE 3 Ohms MAX <3>.INSULATION RESISTANCE 10M Ohms MIN
 - PACKING:SEE P-0039 PACKING DRAWING (BINDING SIZE MUST BE SMALLER THAN BLISTER)

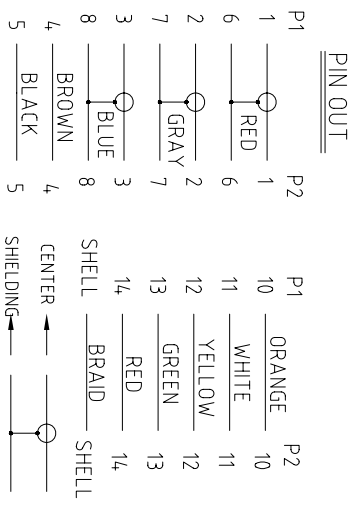

Part No.	DK-113052		
Drawn by	Dec:08,2007	Name	N. Xu
Checked by	Dec:08,2007		ADan
Approved by	Dec:08,2007		T.Aulemann
Title	MORINATOR EXTENTION CABLE VGA MALE TO FEMALE 2 COLOR MOLD WITH DIGITUS LOGO		

RoHS Compliant

1	2	3	4	5	6	7								
A	B	C	D	E	F	G								
H	1	2	3	4	5	6								
H	<table border="1" style="width: 100%;"> <tr> <td style="text-align: center; vertical-align: middle;">ASSMANN Electronic GmbH</td> <td style="text-align: center; vertical-align: middle;">Scale</td> <td style="text-align: center; vertical-align: middle;">Unit</td> <td style="text-align: center; vertical-align: middle;">Sheet</td> </tr> <tr> <td style="text-align: center; vertical-align: middle;">N/A</td> <td style="text-align: center; vertical-align: middle;">MM</td> <td style="text-align: center; vertical-align: middle;">1/1</td> <td></td> </tr> </table>						ASSMANN Electronic GmbH	Scale	Unit	Sheet	N/A	MM	1/1	
ASSMANN Electronic GmbH	Scale	Unit	Sheet											
N/A	MM	1/1												