








Signature	Revision History	Date	Rev.
	For Bulk Production	Dec:08,2007	01

IEEEE 1394 6M  
PLASTIC:BLACK

1800±30


IEEEE 1394 6M  
PLASTIC:BLACK



1 2 3 4 5 6 7

NOTE:

- CABLE:UL20276 [28AWG(7/0.127)T.C\*1PAIR+AL/MYLAR+BRAID SHIELD(16/5/0.1)T.C]\*2  
+22AWG (7/0.254)T.C\*2C+DRAIN WIRE(7/0.1)+MYLAR\*2+AL/MYLAR+BRAID(24/8/0.1)90%  
+PVC JACKET COLOR:MATT BLACK, OD:Ø6.0±0.3mm
- CONNECTOR:  
P1&P2:IEEEE1394 6 PIN MALE CONTACT;GOLD PLATED 15µ"; NICKEL PLATED SHELL
- HOOD:FIRST MOLD:MOULDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)  
SECOND MOLD:MOULDED TYPE,PVC 45P COLOR:BLACK.
- TEST REQUEST:  
<1>.100% OPEN SHORT MIS WIRE TEST  
<2>.CONTACT RESISTANCE 3ΩMAX  
<3>.INSULATION RESISTANCE 10MΩMIN  
5.PACKING:SEE P-0039 PACKING DRAWING  
(BINDING SIZE MUST BE SMALLER THAN BLISTER)

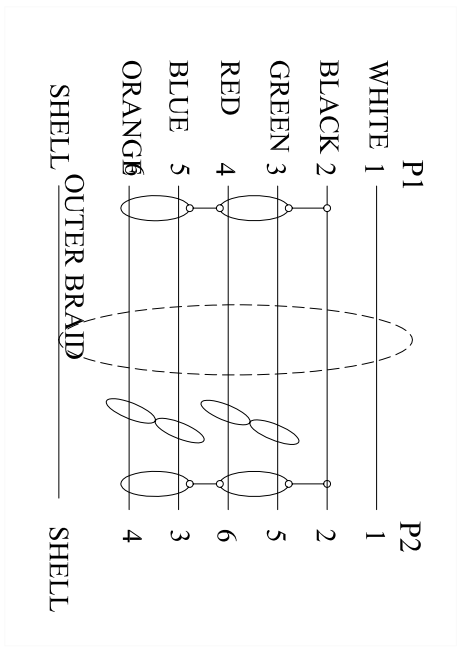

H

RoHS Compliant

Date	Name
Dec:08,2007	N. Xu
Checked by	A.Dan
Dec:08,2007	
Approved by	T.Aulemann
Dec:08,2007	

Part No.  
**DK-115002**

Title  
Firewire Cable,connect 6Pin  
2 COLOR MOLD WITH DIGITUS LOGO

<b>ASSMANN</b> Electronic GmbH		Scale	N/A	Sheet	1/1
STR1407		Unit	MM		

1 2 3 4 5 6 7

H

H