



Signature	Revision History	Date	Rev.
	For Bulk Production	Dec.08.2007	01


DIN 6/M
PLASTIC:BLACK




5000±50

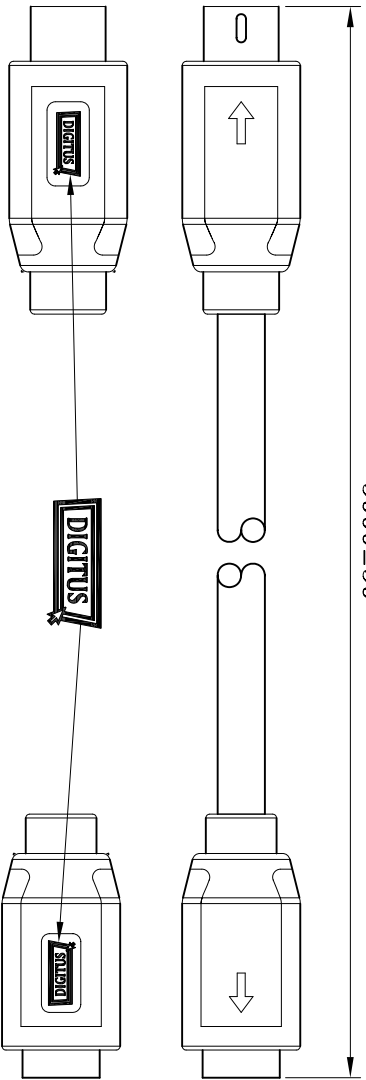

DIN 6/F
PLASTIC:BLACK



NOTE:
1.CABLE:NON-UL 28AWG(7/0.127)T.C*6C INS:PVC+DRAIN WIRE
+AL-FOIL/MYLAR PVC JACKET COLOR:BLACK. OD:Ø5.0±0.2mm
2.CONNECTOR: P1:MD6P MALE TINNED PLATED CONTACT, NICKEL PLATED SHELL.
P2:MD6P FEMALE TINNED PLATED CONTACT, NICKEL PLATED SHELL.
3.HOOD:FIRST MOLD:MOULDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)
SECOND MOLD:MOULDED TYPE,PVC 45P COLOR:BLACK.
4.ELECTRICAL TEST:100% OPEN SHORT MIS WIRE TEST.
CONTACT RESISTANCE 3 MAX.
INSULATION RESISTANCE 5M MIN.
5.PACKING:SEE P-0039 PACKING DRAWING(BINDING SIZE MUST BE SMALLER THAN BLISTER)

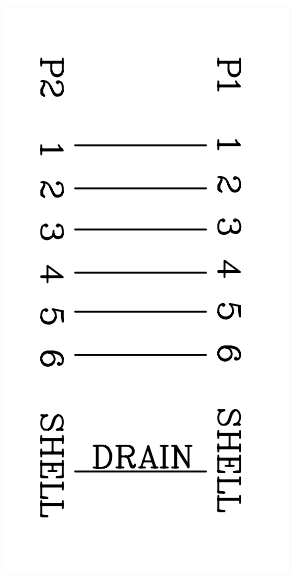

1	2	3	4	5	6	7	
A	B	C	D	E	F	G	H

RoHS Compliant

STR1407

	Date	Name
Drawn by	Dec.08.2007	N. Xu
Checked by	Dec.08.2007	A.Dan
Approved by	Dec.08.2007	T.Aulemann

Part No.	DK-103002
Title	PS/2 Extension cable, MiniDin 6 pin 2 COLOR MOLD WITH DIGITUS LOGO
Scale	N/A
Unit	MM
Sheet	1/1

ASSMANN
Electronic GmbH

H