


Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01

A
USB B TYPE MALE
PLASTIC: WHITE

A
USB B TYPE MALE
PLASTIC: WHITE

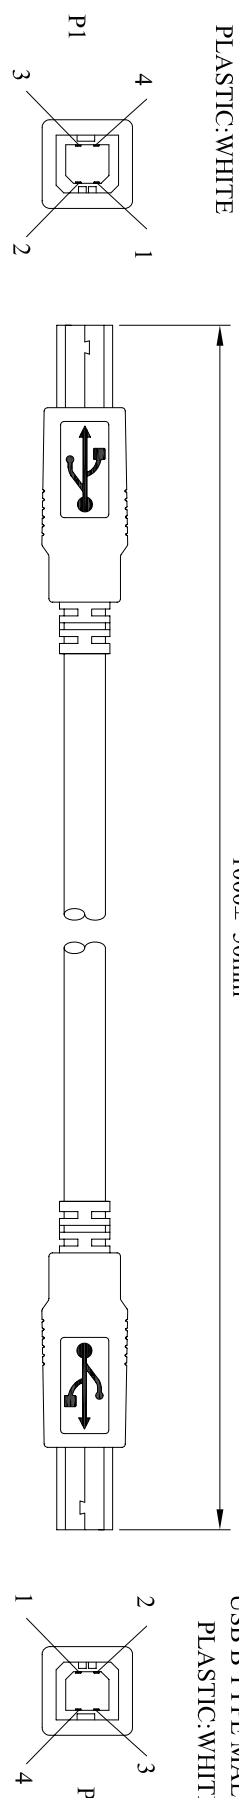

NOTE:

1. CABLE: UL2725 28AWG(7/0.127)*1P INS:PE,COLOR:WHITE, GREEN.
+24AWG*2C(7/0.203)TC,INS:SR-PVC,COLOR:RED,BLACK+
AL/MY+BRAID(65%),PVC JACKET,OD=Ø4.7±0.15MM,BEIGE COLOR.
2. CONNECTOR:
P1&P2:USB B TYPE MALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL.
4. HOOD: MOLDED TYPE,PVC 45P,COLOR:BEIGE.
5. ELECTRICAL TEST:
(1)100% OPEN SHORT & MIS WIRE TEST.
(2)CONTACT RESISTANCE 3 ohms MAX.
(3)INSULATION RESISTANCE 20M ohms MIN.
6. PACKING:SEE P-0039 REV.C PACKING DRAWING.
PACKING TYPE: DB VP2
(HANKING SIZE MUST BE SMALLER THAN PACKING)

PIN OUT	
P1	P2
1	1
2	2
3	3
4	4
BRAID	SHELL
SHELL	SHELL

Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

Part No.	AK 673-1
Title:	USB B/M TO USB B/M CABLE:GRAY 1.0M

RoHS Compliant

EAN Code:
4016032050841

ST181407

ASSMANN
Electronic GmbH

Scale	N/A	Sheet	1/1
Unit	MM		

1	2	3	4	5	6	7
H	G	F	E	D	C	B