


Signature	Date	Rev.
Alan Dan	Dec.20,2005	01
Revision History		
For Bulk Production		

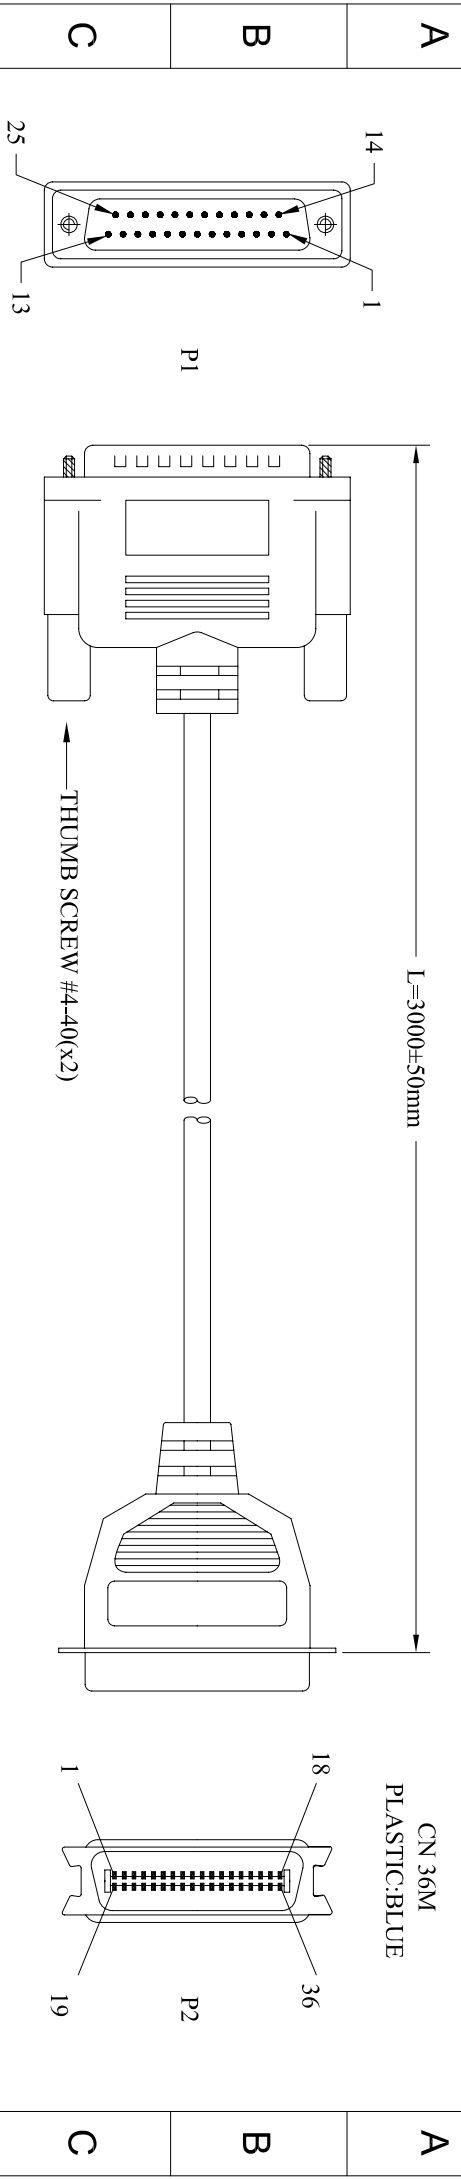

		PIN OUT													
P1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	
P2	1	2	3	4	5	6	7	8	9	10	11	12	13	14	
	15	16	17	18	19	19	20	21	22	23	24	25			
	32	31	36	33	33	19	21	23	25	27	29	30	SHELL		

- NOTES:
- CABLE:NON-UL 25C\*28AWG(7/0.127)TINNED COPPER INS:PVC +AL/MYLAR+DRAIN WIRE:26AWG(7/0.16)TINNED COPPER JACKET:PVC COLOR:BEIGE,OD:7.0±0.2mm
  - CONNECTOR:
    - P1:DB 25P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL.
    - P2:CN 36P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL.
  - HOOD:MOLDED TYPE PVC 45P,COLOR:BEIGE.
  - TEST REQUEST:100% OPEN SHORT & MIS WIRE TEST,  
CONTACT RESISTANCE 3 OHMS MAX  
INSULATION RESISTANCE 20M OHMS MIN
  - PACKING:SEE P-0039 REV.C PACKING DRAWING  
PACKING TYPE: DB VP4.  
(HANKING SIZE MUST BE SMALLER THAN PACKING)

RoHS Compliant

EAN Code:  
4016032062653

Drawn by	Dec.20,2005	Alex Dan
Checked by	Dec.20,2005	Norman Xu
Approved by		

**ASSMANN**  
Electronic GmbH

Title: **DB25M/CN 36M,3M**

Part No. **AK 127 3M**

Scale: N/A  
Unit: MM

Sheet 1/1

1	2	3	4	5	6	7
---	---	---	---	---	---	---