


Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01

USB A TYPE MALE 3000 ± 30mm USB B TYPE MALE

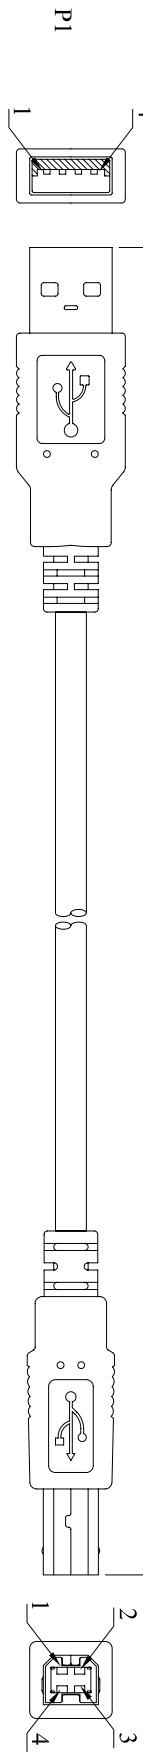

NOTES:

1. CABLE: UL-2725 30AWG(7/0.102 B.C)*2C INS:SR-PVC ID:0.8± 0.05
 +30AWG(7/0.102 B.C)*2C INS:SR-PVC ID:0.6± 0.05+AL-FOLL/MYLAR
 +DRAIN WIRE 32AWG(1/0.203 B.C)+BRAID(8/2/0.1 T.C)
 PVC JACKET OD:4.0± 0.15mm COLOR:BLACK, REV.2.0

2.CONNECTER:
 P1: USB A TYPE MALE GOLD FLASH CONTACT,
 NICKEL PLATED SHELL
 P2: USB B TYPE MALE GOLD FLASH CONTACT,
 NICKEL PLATED SHELL

3.HOOD: MOLDED TYPE,PVC 45P, COLOR:BLACK.
 4.ELECTRICAL TEST:

- <1>100% OPEN SHORT & MIS WIRE TEST.
- <2>CONTACT RESISTANCE 3 Ohms MAX.
- <3>INSULATION RESISTANCE 20M Ohms MIN.

5.PACKING:SEE P-0039 REV.C PACKING DRAWING
 PACKING TYPE:DB VP3
 (HANKING SIZE MUST BE SMALLER THAN PACKING)

P1	RED	1	VCC
	WHITE	2	-DATA
	GREEN	3	+DATA
	BLACK	4	GROUND
	SHELL		BRAID
P2		1	SHELL

Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

Part No.	AK 672/3 AL
Title:	Standard USB 2.0 Connection Cable

RoHS Compliant

EAN Code:
4016032183587

S7R1407

A	1	2	3	4	5	6	7	A
B	1	2	3	4	5	6	7	B
C	1	2	3	4	5	6	7	C
D	1	2	3	4	5	6	7	D
E	1	2	3	4	5	6	7	E
F	1	2	3	4	5	6	7	F
G	1	2	3	4	5	6	7	G
H	1	2	3	4	5	6	7	H