Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01

IEEE1394 4PIN MALE
INSULATOR:BLACK



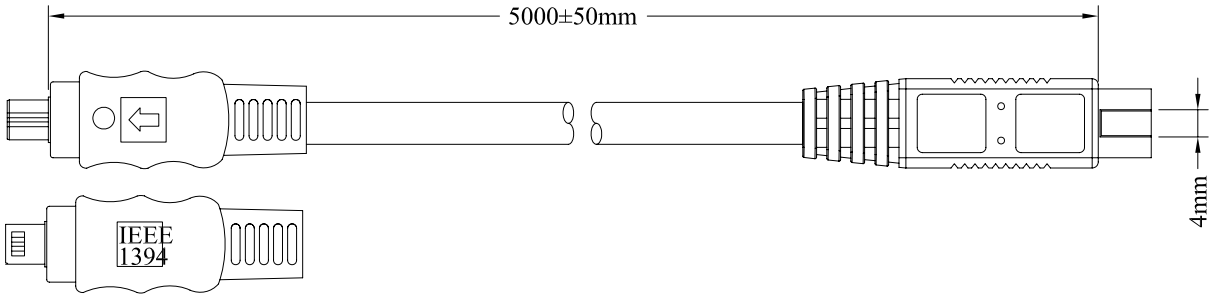

IEEE1394b 9PIN BILINGUAL MALE
INSULATOR:BLACK



NOTES:

1. CABLE: {[30AWG(7/0.103)*1PAIR+DRAIN WIRE(7/0.103)*2C+AL/MY+MY]*2C
+26AWG(7/0.163)*2C+MY*1+AL/MY+85% BRAID(16/6/0.12)}TIN
30AWG INS:FO-SKIN ID:Ø0.9±0.01mm COLOR:RED&GREEN, BLUE&ORANGE
26AWG INS:SR-PVC ID:Ø1.0±0.07mm COLOR:WHITE, BLACK
PVC JACKET COLOR:BLACK, OD:5.5±0.2mm
UL20276 IEEE 1394 CABLE
2.CONNECTOR:
P1: IEEE1394 4PIN MALE GOLD PLATED 15U" CONTACT
NICKEL PLATED SHELL.
P2: IEEE1394b 9PIN BILINGUAL MALE GOLD PLATED 15U" CONTACT
NICKEL PLATED SHELL.
3.HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK.
4.TEST REQUEST:
<1>.100% OPEN SHORT & MIS WIRE TEST
<2>.CONTACT RESISTANCE 3 OHMS MAX
<3>.INSULATION RESISTANCE 20M OHMS MIN
<4>.HI-POT: DC 300V / 0.01 sec
5.PACKING:SEE P-0039 REV.C PACKING DRAWING
PACKING TYPE: DB VP4.
(HANKING SIZE MUST BE SMALLER THAN PACKING)

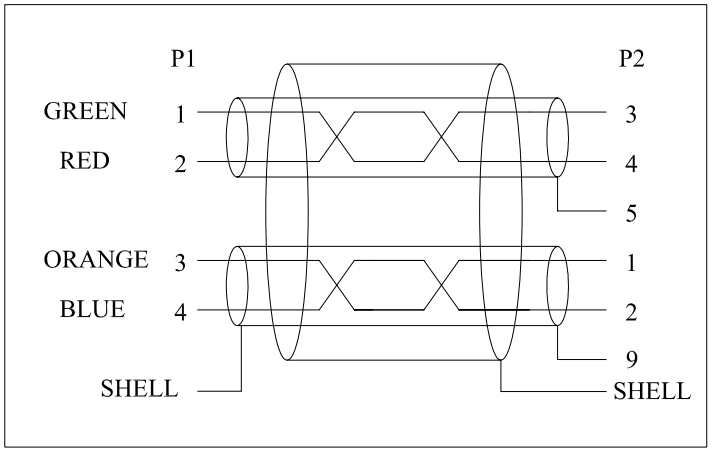

EAN Code:
4016032142270

	Date	Name
Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

ASSMANN
Electronic GmbH

ST81407

Part No.
AK-1394B-504

Title.
1394 4PIN MALE - 1394B 9PIN
BILINGUAL MALE CABLE

Scale	N/A	Sheet
Unit	MM	1/1