


| | | | |
|-----------|---------------------|-------------|------|
| Signature | Revision History | Date | Rev. |
| Norman Xu | For Bulk Production | Dec.20,2005 | 01 |


IEEEE1394 4PIN MALE
INSULATOR:BLACK

IEEEE1394b 9PIN BILINGUAL MALE
INSULATOR:BLACK

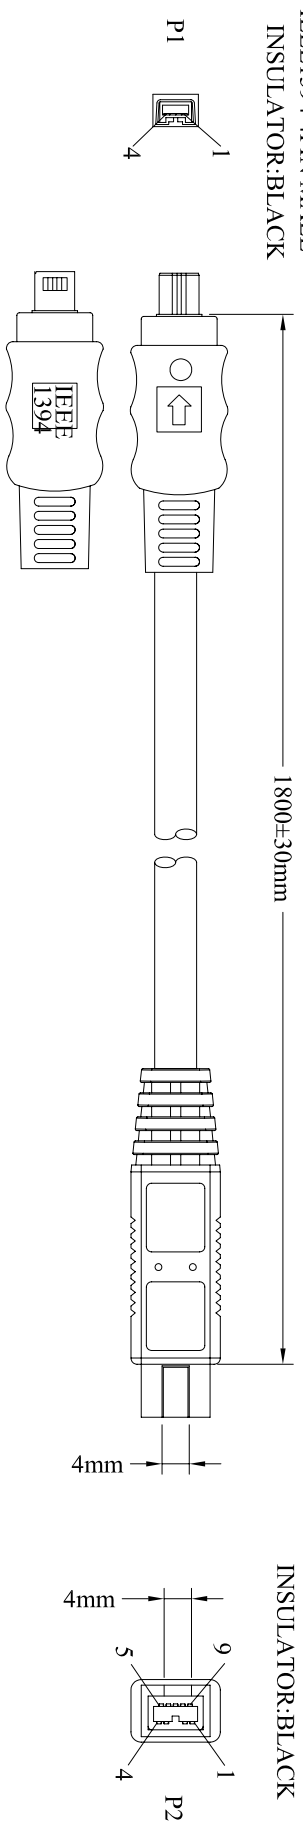

NOTES:

- CABLE: {30AWG(7/0.103)*1PAIR+DRAIN WIRE(7/0.103)*2C+AL/MY+MY*2C +26AWG(7/0.163)*2C+MY*1+AL/MY+85% BRAID(16/6/0.12)} TIN
30AWG INS:FO-SKIN ID:Ø0.9±0.01mm COLOR:RED&GREEN, BLUE&ORANGE
26AWG INS:SR-PVC ID:Ø1.0±0.07mm COLOR:WHITE, BLACK
PVC JACKET COLOR:BLACK, OD:5.5±0.2mm
UL20276 IEEEE 1394 CABLE
- CONNECTOR:
P1: IEEEE1394 4PIN MALE GOLD PLATED 15U" CONTACT
NICKEL PLATED SHELL.
P2: IEEEE1394b 9PIN BILINGUAL MALE GOLD PLATED 15U" CONTACT
NICKEL PLATED SHELL.

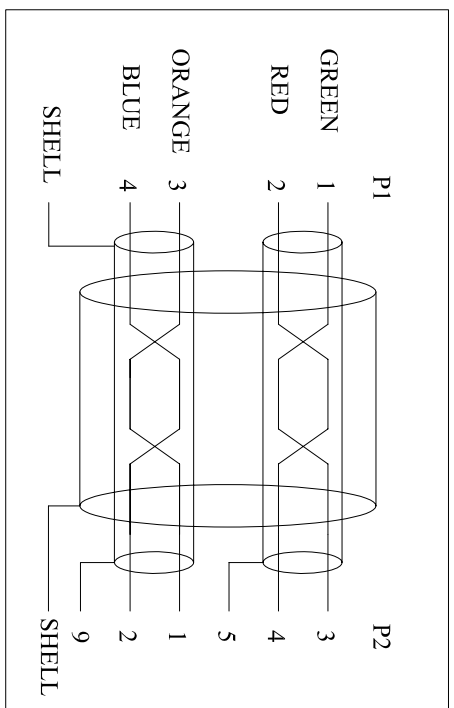

- HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK.
- TEST REQUEST:

- <1>.100% OPEN SHORT & MIS WIRE TEST
- <2>.CONTACT RESISTANCE 3 OHMS MAX
- <3>.INSULATION RESISTANCE 20M OHMS MIN
- <4>.HI-POT: DC 300V / 0.01 sec
- PACKING:SEE P-0039 REV.C PACKING DRAWING
PACKING TYPE: DB VP2.
(HANKING SIZE MUST BE SMALLER THAN PACKING)

EAN Code:
4016032142256

| | | |
|-------------|-------------|-----------|
| Drawn by | Dec.20,2005 | Norman Xu |
| Checked by | Dec.20,2005 | Alex Dan |
| Approved by | | |

| | |
|----------|--|
| Part No. | AK-1394B-184 |
| Title. | 1394 4PIN MALE - 1394B 9PIN BILINGUAL MALE CABLE |

ASSMANN
Electronic GmbH

| | | | |
|-------|-----|-------|-----|
| Scale | N/A | Sheet | 1/1 |
| Unit | MM | | |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | A |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | H |