Signature	Revision History	Date	Rev.
Alex Dan	For Bulk Production	Nov.11,2006	01

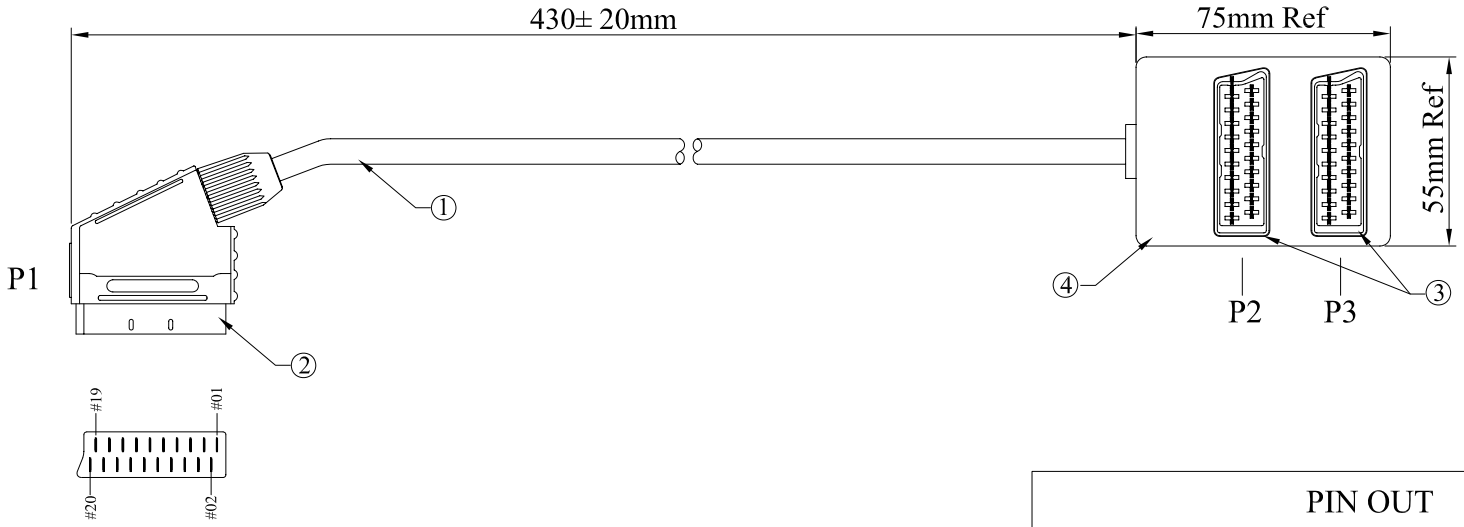

PIN OUT

P1	P2	P3	P1	P2	P3
1	1	1	11	11	11
2	2	2	12	12	12
3	3	3	13	13	13
4	4	4	14	14	14
5	5	5	15	15	15
6	6	6	16	16	16
7	7	7	17	17	17
8	8	8	18	18	18
9	9	9	19	19	19
10	10	10	20	20	20
			SHELL	Drain 21	Drain 21

NOTES.:

Material:

1. Cable: NO-UL 20C*(7/0.10)+Drain(7/0.127)+AL/MY+PVC Jacket.
   OD= 7.0 ± 0.2mm, Jacket Color: Black .
2. P1 Conn.: SCARAT Male Nickle-Plated CONN 20PIN, Male crimp type inside black.
3. P2,P3 Conn.: SCARAT FeMale Nickle-Plated CONN 21PIN, Black Insulation.
4. Scart Holder Box Color: Black.

Electrical Properties

1. It Shall Not Have Any Open/Short, Miswiring and Intermittent Failures.
2. The Cable Assembly Shall be 100% Electrical Test .
3. DC Test: 300V.
4. Insulation Resistance: 5.0M ohm.
5. Conductance Resistance: 3.0 ohm.

RoHS Compliant

	Date	Name
Drawn by	Nov.10,2006	Alex Dan
Checked by	Nov.10,2006	Norman Xu
Approved by		

ASSMANN Electronic GmbH

ST*****

Part No.

AB 316

Title:

Scart Splitter

Scale	N/A	Sheet 1/1
Unit	MM	