

1

2

3

4

5

6

7

Signature	Revision History	Date	Rev.
Alex.Dan	For Bulk Production	Dec.20,2006	01

500±10mm

P1

P2

P3

P4

NOTE:

1. CABLE:

UL2725 80°C 30V [26AWG(1/0.404)×2F+AL/MY+DRAIN WIRE(1/0.32)×2]TIN
 INS:FOAM-PE OD:φ1.1±0.05mm
 PVC JACKET OD:φ(2.2±0.1)×(7.8±0.2)mm COLOR:RED (PANTONE 200C)

2. CONNECTOR:

P1 & P2: SATA II 7P RIVETING TYPE PBT BLACK G/F W/METAL SHELL
 P3 & P4: SATA I 7P L TYPE PBT BLACK G/F


3. HOOD: MOLDED TYPE, PVC 45P, COLOR:BLACK

4. CABLE ASS'Y ELECTRICAL TEST:

4-1 100% OPEN SHORT & MIS WIRE TEST
 4-2 CONTACT RESISTANCE 3 OHM MAX
 4-3 INSULATION RESISTANCE 10M OHM MIN
 4-4 HI-POT DC300V/0.01SEC.

5. PACKING: SEE P-0039 REV.C PACKING DRAWING.

WIRING TABLE

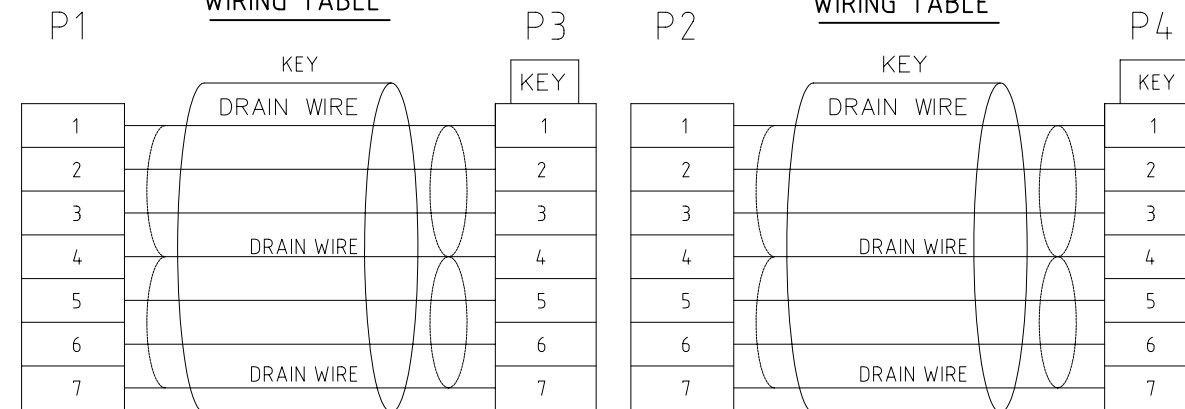

RoHS Compliant

EAN Code:
4016032193814

ST81407

	Date	Name
Drawn by	Dec.20,2006	Alex Dan
Checked by	Dec.20,2006	Norman Xu
Approved by		

ASSMANN
Electronic GmbH

Part No.

AK-ESATA-SB2

Title.

Slotbracket with eSATA Connector

Scale	N/A	Sheet
Unit	MM	1/1

1

2

3

4

5

6

7