


Signature	Revision History	Date	Rev.
N.Xu	For Bulk Production	Dec.08.2007	01

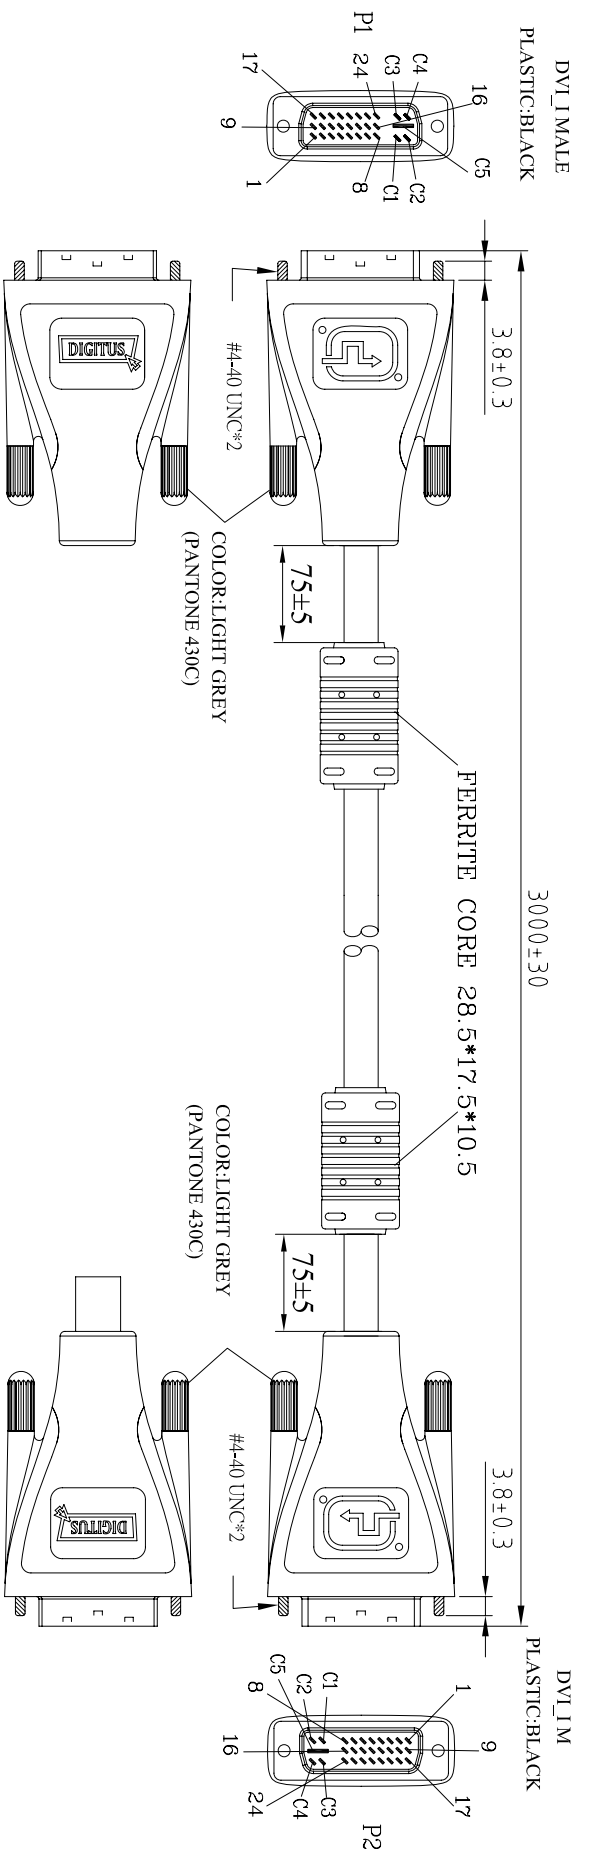

- NOTE:
- CABLE:UL20276{[30AWG(7/0.103)+(16/5/0.1)BRAID]*3COAX+[28AWG(7/0.127)*1P +DRAIN WIRE(7/0.127)+AL/MY+MY]*7C+28AWG(7/0.127)*1P +28AWG(7/0.127)*5C+AL/MY+D.W+(2/4/8/0.12)BRAID};TIN
PVC JACKET OD:9.5±0.2mm COLOR:BLACK..
 - CONNECTOR:
P1&P2:DVI_I 29P: 24+5 MALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL
 - SHIELD: P1&P2 COPPER FOIL 360°SOLDERED TO CONNECTOR SHELL & CABLE BRAID
 - HOOD:FIRST MOLD:MOLDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)
SECOND MOLD:MOLDED TYPE,PVC 45P COLOR:BLACK.
 - PACKING:SEE P-0039 PACKING DRAWING(BINDING
SIZE MUST BE SMALLER THAN BLISTER)

Date	Name
Dec.08.2007	N. Xu
Dec.08.2007	A.Dan
Dec.08.2007	T.Aulemann

Part No.	DK-110020
Title	DVI 24+5 MALE TO DVI 24+5 MALE CABLE 2 COLOR MOLD WITH DIGITUS LOGO

RoHS Compliant

S181407

ASSMANN	
Electronic GmbH	

Scale	N/A	Sheet	1/2
Unit	MM		

1	2	3	4	5	6	7	A
H	G	F	E	D	C	B	A