Signature	Revision History	Date	Rev.
N.Xu	For Bulk Production	Dec.08,2007	01

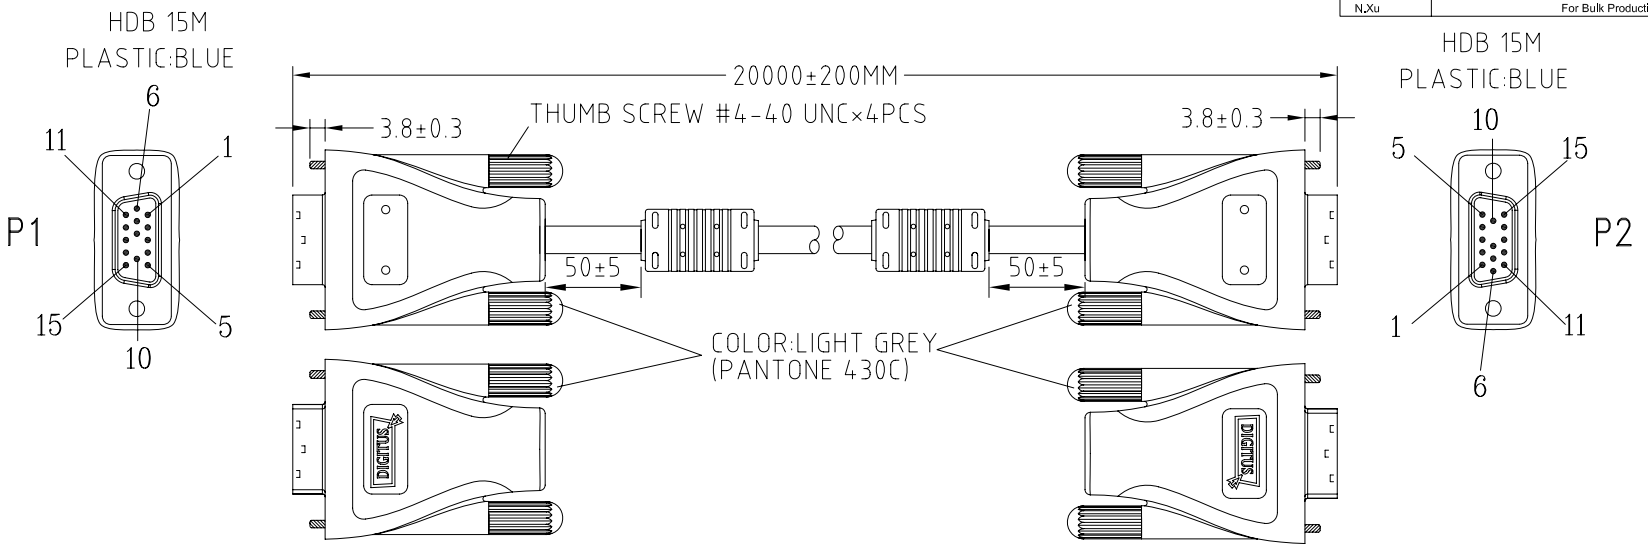

NOTE:

1.CABLE:UL2919 28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INS:FO-PE SPIRAL,INNER JACKET:PVC OD:Ø2.5±0.1mm(UL-1354)+28AWG (7/0.127 T.C)*7C+INS:SR-PVC ID:Ø0.9±0.05mm(UL-1061)+AL/MY+DRAIN WIRE: 26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC COLOR: BLACK, OD:Ø8.5±0.15mm.

2.CONNECTOR:
P1&P2:HDB 15P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL.
9TH PIN IS EMPTY.

3.FERRITE CORE:17.5*28.5*9.5mm.

4.SHIELD:COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID.

5.HOOD:FIRST MOLD:MOLDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)
SECOND MOLD:MOLDED TYPE,PVC 45P COLOR:BLACK.

6.PACKING:SEE P-0039 PACKING DRAWING.
(BINDING SIZE MUST BE SMALLER THAN BLISTER)

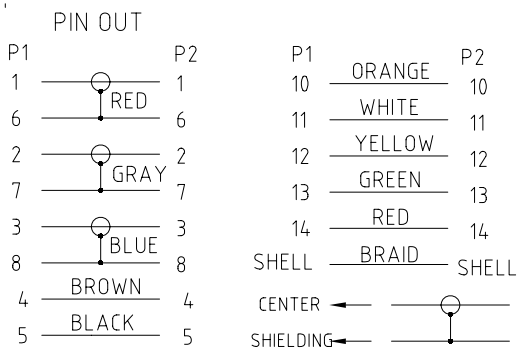

	Date	Name
Drawn by	Dec.08,2007	N. Xu
Checked by	Dec.08,2007	A.Dan
Approved by	Dec.08,2007	T.Aufermann

ASSMANN Electronic GmbH

ST81407

RoHS Compliant

Part No.

DK-113048

Title

MONITOR CONNECTION CABLE VGA MALE TO MALE

2 COLORS MOLD WITH DIGITUS LOGO

Scale	N/A	Sheet
Unit	MM	1/1