






Signature	Revision History	Date	Rev.
	For Bulk Production	Dec:08,2007	01

IEEEE 1394 6M
PLASTIC:BLACK

5000±50







IEEEE 1394 6M
PLASTIC:BLACK



IEEEE 1394 6M
PLASTIC:BLACK

5000±50

IEEEE 1394 6M
PLASTIC:BLACK

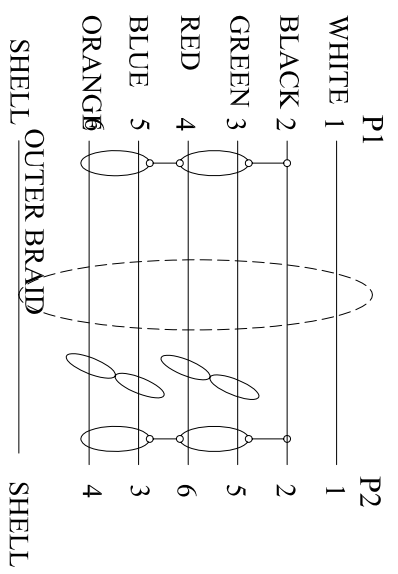

NOTE:

- CABLE:UL20276 [28AWG(7/0.127)T.C*1PAIR+AL/MYLAR+BRAID SHIELD(16/5/0.1)T.C]*2 +22AWG (7/0.254)T.C*2C+DRAIN WIRE(7/0.1)+MYLAR*2+AL/MYLAR+BRAID(24/8/0.1)90% +PVC JACKET COLOR:MATT BLACK, OD:Ø6.0±0.3mm
- CONNECTOR:
P1&P2:IEEEE1394 6 PIN MALE CONTACT;GOLD PLATED 15µ"; NICKEL PLATED SHELL
- HOOD:FIRST MOLD:MOULDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)
SECOND MOLD:MOULDED TYPE,PVC 45P COLOR:BLACK.
- TEST REQUEST:
<1>.100% OPEN SHORT MIS WIRE TEST
<2>.CONTACT RESISTANCE 3ΩMAX
<3>.INSULATION RESISTANCE 10MΩMIN
5.PACKING:SEE P-0039 PACKING DRAWING
(BINDING SIZE MUST BE SMALLER THAN BLISTER)

RoHS Compliant

Date	Name
Dec:08,2007	N. Xu
Checked by	Aldan
Dec:08,2007	
Approved by	T.Aulemann
Dec:08,2007	

Part No.	DK-115004
Title	Firewire Cable connect 6Pin 2 COLOR MOLD WITH DIGITUS LOGO
Scale	N/A
Unit	MM
Sheet	1/1

ASSMANN
Electronic GmbH

STR1407

A	1	2	3	4	5	6	7	A
B	1	2	3	4	5	6	7	B
C	1	2	3	4	5	6	7	C
D	1	2	3	4	5	6	7	D
E	1	2	3	4	5	6	7	E
F	1	2	3	4	5	6	7	F
G	1	2	3	4	5	6	7	G
H	1	2	3	4	5	6	7	H