


Signature	Revision History	Date	Rev.
	For Bulk Production	Dec:08,2007	01


1000±20

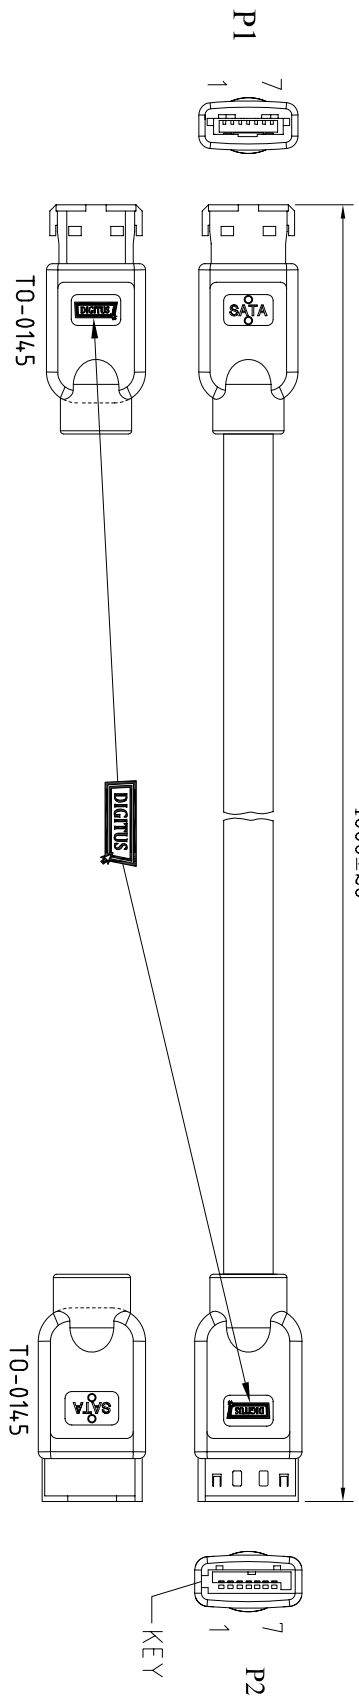

NOTES:

1. CABLE: UL2725 [26AWG(1/0.404)*2F INS:HD-PE ID:1.3*2.7+DRAIN WIRE 28AWG(1/0.32)*2C+AL/MY]*2C INNER JACKET:PVC OD:7.3*2.1mm +AL/MY+BRAID(1/6/10/0.1)PVC JACKET, COLOR: BLACK, OD:9.0*4.0mm, IMPEDANCE: 100 OHM.
2. CONNECTOR:P1:SATA II 7P RIVETING TYPE CRIMP TYPE PBT BLACK G/F W/METAL SHELL P2:SATA I 7P CRIMP TYPE PLASTIC BLACK G/F W/METAL SHELL.
3. SHIELD: COPPER-FOIL
4. HOOD: FIRST MOLD: MOLDED TYPE, PVC 30P, COLOR: LIGHT GREY (PANTONE 430C) SECOND MOLD: MOLDED TYPE, PVC 45P COLOR: BLACK.
5. TEST REQUEST:
 1. 100% OPEN SHORT & MIS WIRE TEST
 2. CONTACT RESISTANCE: 3 ohm MAX
 3. INSULATION RESISTANCE: 10M ohm MIN
 4. HI-POT DC 300V/0.01SEC
6. PACKING: SEE P-0039 PACKING DRAWING. (BINDING SIZE MUST BE SMALLER THAN BLISTER)

PIN ASSIGNMENT

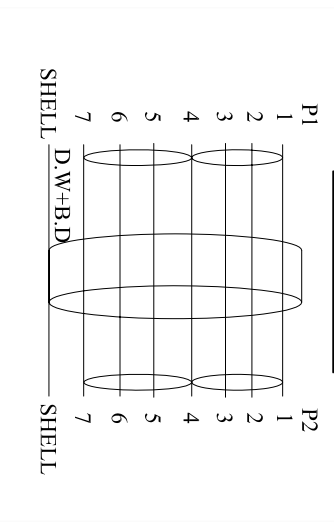

1	2	3	4	5	6	7	
A	B	C	D	E	F	G	H

RoHS Compliant

Drawn by	Dec:08,2007	N. Xu
Checked by	Dec:08,2007	A.Dan
Approved by	Dec:08,2007	T.Aulemann

ASSMANN
Electronic GmbH

Part No. **DK-126004**

Title
SATA Cable connect eSata L-Type-Sata L-Type.
2 COLOR MOLD WITH DIGITUS LOGO

Scale N/A
Unit MM

Sheet 1/1

STR1407