





1. Carefully remove cover from HD enclosure



4. Assemble PCB shielding above PCBA

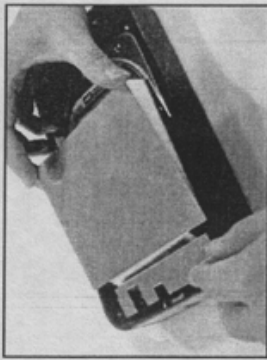


2. Insert SATA hard drive

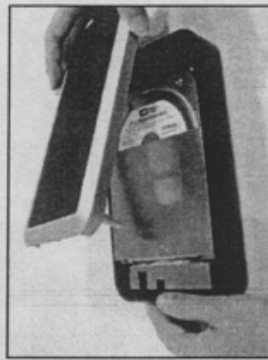


5. Replace cover onto HD enclosure



3. Securely tighten screws from the bottom of HD enclosure to fix hard disk (4pcs short screws)

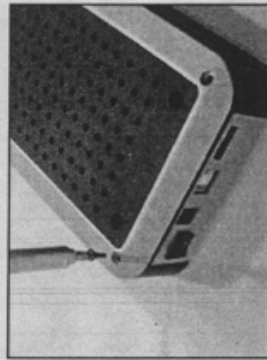

6. Use screws (2pcs longer, 2pcs shorter) from the bottom of HD enclosure to tighten it

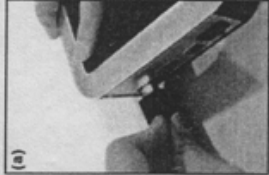


7a. If would like to use eSATA cable, plug eSATA cable into the HD enclosure  
7b. If would like to use USB cable, plug USB into the HD enclosure




8a. After plugging eSATA cable into the HD enclosure, plug adapter into HD enclosure  
8b. After plugging USB into the HD enclosure, plug adapter into HD enclosure



10. Plug adapter

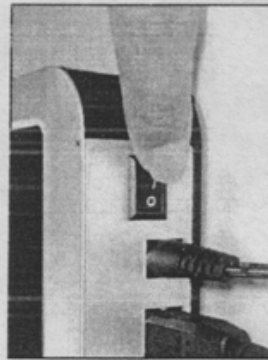

11. Press the switch for power on

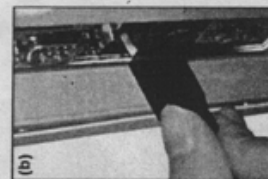

9a. Plug eSATA cable into PC or laptop  
9b. Plug USB cable into PC or laptop