

Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01


1 2 3 4 5 6 7

A

USB"B" TYPE(M)

1000±50mm

USB"A" TYPE(M)

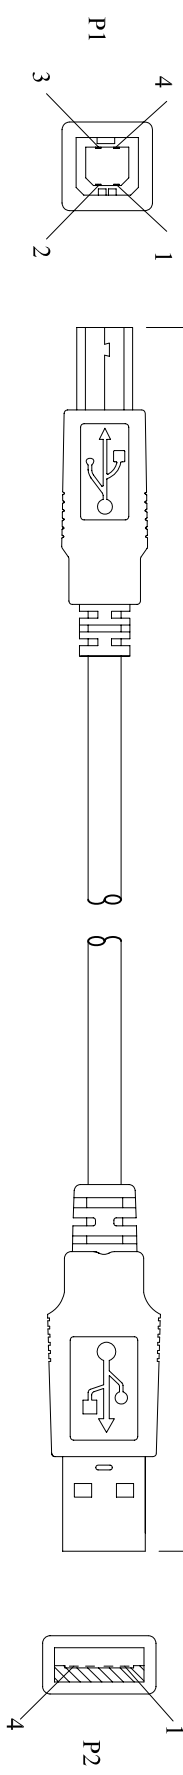

B

C

NOTES:

- 1.CABLE: UL-2725 28AWG(7/0.127)TC\*1P INS:PE COLOR:WHITE, GREEN +2C\*24AWG(7/0.203)TC INS:SR-PVC COLOR:RED,BLACK+AL/MYLAR DRAIN WIRE+BRAID SHIELD (65%) PVC JACKET, OD:4.7 ± 0.15mm COLOR:BEIGE.
- 2.CONNECTORS:  
P1 :USB B TYPE MALE GOLD FLASH CONTACT NICKEL PLATED SHELL.  
P2 :USB A TYPE MALE GOLD FLASH CONTACT NICKEL PLATED SHELL.
- 3.HOOD:MOULDED TYPE,PVC 45P, COLOR:BEIGE.
- 4.TEST REQUESTED:

D

E

PIN OUT	
P1	P2
RED 1	1
WHITE 2	2
GREEN 3	3
BLACK 4	4
SHELL	BRAID
	SHELL

F

- <1> .100% OPEN SHORT & MIS WIRE TEST.
- <2> .CONTACT RESISTANCE 3Ω MAX.
- <3> .INSULATION RESISTANCE 20MΩ MIN.
- 5.PACKING:SEE P-0039 REV.C PACKING DRAWING.
- PACKING TYPE: DB VP2
- (HANKING SIZE MUST BE SMALLER THAN PACKING)

G

RoHS Compliant

EAN CODE:  
4016032050766

H

Part No.	AK 672-1	
Title	USB AM TO USB BM CABLE. 1.0M	
Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

<b>ASSMANN</b>		
Electronic GrmbH		
Scale	N/A	Sheet 1/1
Unit	MM	

1 2 3 4 5 6 7

H

G

F

E

D

C

B

A

STR1407