


AK-AV508 : 1.5M S-VHS PLUG TO S-VHS JACK, GOLD PLATED.

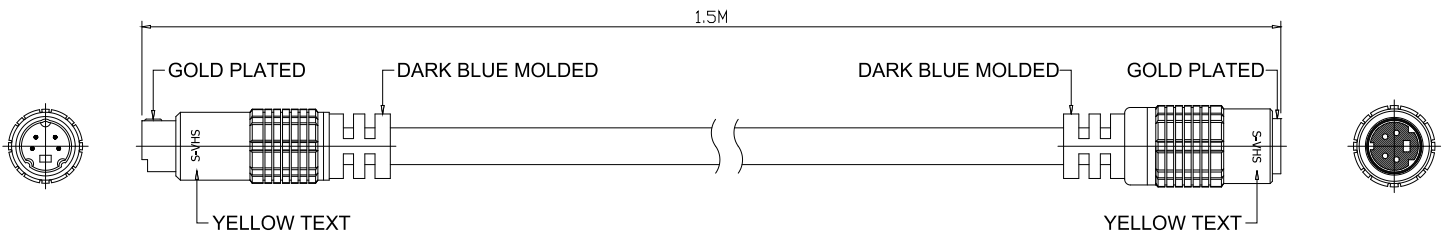


CABLE CONSTRUCTION

ITEM		SPEC.
CENTER CONDUCTOR	MATERIAL	COPPER WIRE
	CONSTRUCT	mm/No. 0.16 x 16
	O.D.	mm 0.74 ± 0.05
INSULATION	MATERIAL	PE FOAM
	THICK	mm 0.28 ± 0.10
	O.D.	mm 1.30 ± 0.10
SPIRAL SHIELD	MATERIAL	COPPER WIRE
	CONSTRUCT	mm/No. 0.12 x 36 ± 3
	TYPE	SPIRAL
MIDDLE PVC JACKET	MATERIAL	PVC
	O.D.	mm 2.30 ± 0.10 x 2C
FILLING	MATERIAL	FILLER
PAPER	MATERIAL	PAPER
FOIL	MATERIAL	FOIL
OUTER BRAID SHIELD	MATERIAL	COPPER WIRE
	CONSTRUCT	mm/No. 0.12 x 4 / 16
	TYPE	BRAID
PVC JACKET	MATERIAL	PVC
	O.D.	mm 6.50 ± 0.15
	COLOR	DARK BLUE

08.23.2002 original

AK-AV508 : 1.5M S-VHS PLUG TO S-VHS JACK, GOLD PLATED.

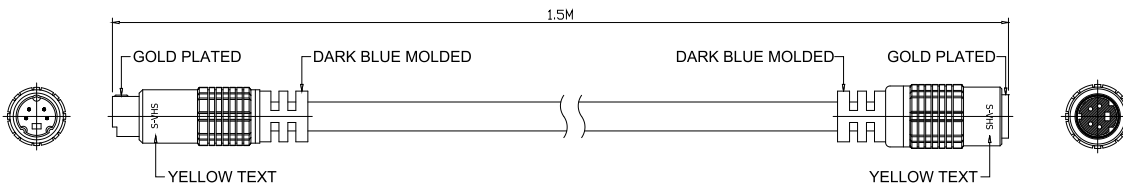

CABLE CONSTRUCTION

	ITEM	SPEC.
CENTER CONDUCTOR	MATERIAL	COPPER WIRE
	CONSTRUCT	mm/No. 0.16 x 16
	O.D.	mm 0.74 ± 0.05
INSULATION	MATERIAL	PE FOAM
	THICK	mm 0.28 ± 0.10
	O.D.	mm 1.30 ± 0.10
SPIRAL SHIELD	MATERIAL	COPPER WIRE
	CONSTRUCT	mm/No. 0.12 x 36 ± 3
	TYPE	SPIRAL
MIDDLE PVC JACKET	MATERIAL	PVC
	O.D.	mm 2.30 ± 0.10 x 2C
FILLING	MATERIAL	FILLER
PAPER	MATERIAL	PAPER
FOIL	MATERIAL	FOIL
OUTER BRAID SHIELD	MATERIAL	COPPER WIRE
	CONSTRUCT	mm/No. 0.12 x 4 / 16
	TYPE	BRAID
PVC JACKET	MATERIAL	PVC
	O.D.	mm 6.50 ± 0.15
	COLOR	DARK BLUE

RANGE	TOLERANCE
0-5	0.05
5-25	0.1
25-100	0.2
100-500	0.5
500-1000	1.0
1000-10000	2.0

æi	mm	ñO	1:1	sí	ý O ù	Éa	AK-AV508	Xié
ik	ÅT#k	¶/E	1/1	Éá	ASSMANN	S*		
				fó		S*		08.23.2002
				ï		WU		