


Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01

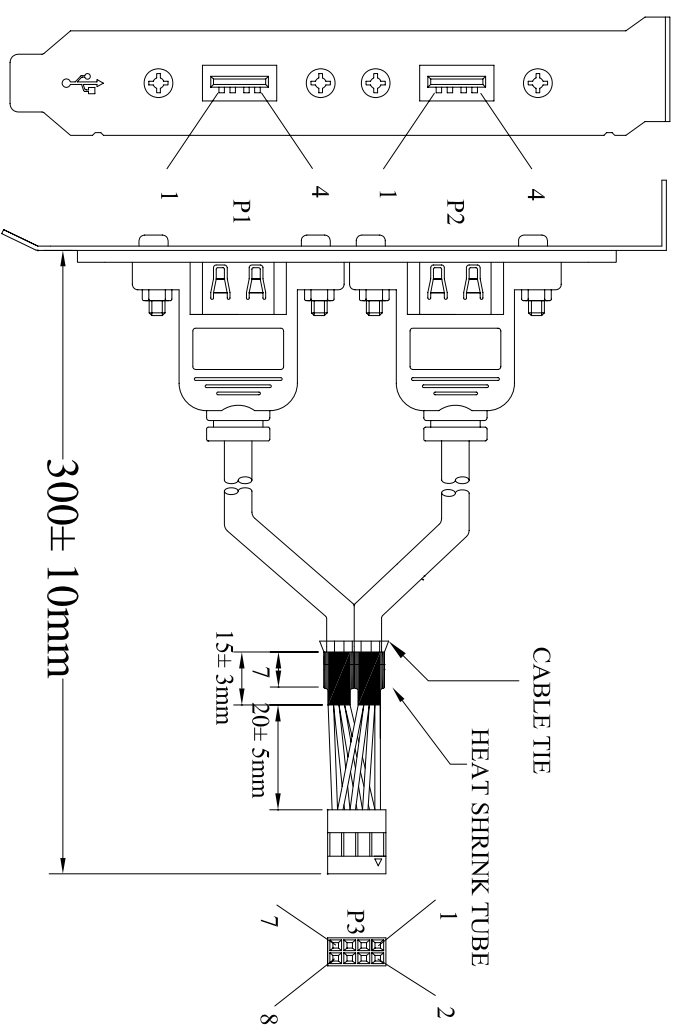

- NOTES:
1. CABLE: UL-2725 28AWG*1PR+24AWG*2C
+AL-FOIL+DRAIN+BRAID(65%),PVC JACKET
COLOR:BEIGE,OD:4.7±0.2mm
 2. CONNECTOR:
P1 & P2: USB A SERIES FEMALE, SOLDER TYPE
P3 & P4: A2541T3B-2
 3. TERMINAL:JW7#A2541HO2-2*4P PITCH:2.54
 - 4.HOUSING:JW7#A2541HO2-2*4P PITCH:2.54
 - 5.HOOD:MOULDED PVC 45P, COLOR:BEIGE.
 - 6.ELECTRICAL TEST:100% OPEN SHORT & MIS WIRE TEST
CONTACT RESISTANCE 3 OHM MAX
INSULATION RESISTANCE 20M OHM MIN
 - 7.PACKING:SEE P-0039 REV.C PACKING DRAWING
- PACKING TYPE : DB VP4
(HANKING SIZE MUST BE SMALLER THAN PACKING)

P2	COLOR	P1	COLOR	P3
1	— RED	1	— RED	7
2	— WHITE	2	— WHITE	5
3	— GREEN	3	— GREEN	4
4	— BLACK	4	— BLACK	6
	+DRAIN		+DRAIN	1
				8
	SHELL	BRAID		
	SHELL	BRAID		

Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

Part No.	AK 674-2/4
Title:	2*USB A/F TO 2.54MM 8PIN HSG ,BEIGE

RoHS Compliant

EAN Code:
4016032086345

ST81407

ASSMANN
Electronic GmbH

Scale	N/A	Sheet	1/1
Unit	MM		

1	2	3	4	5	6	7	A
H	G	F	E	D	C	B	A