
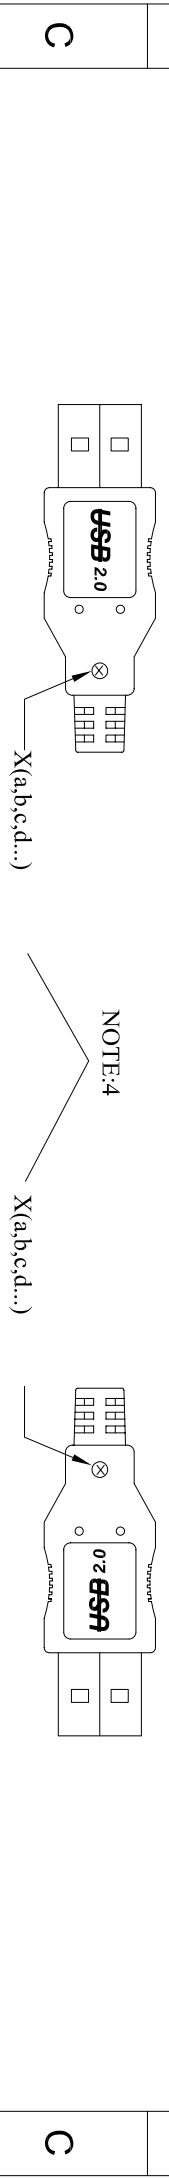

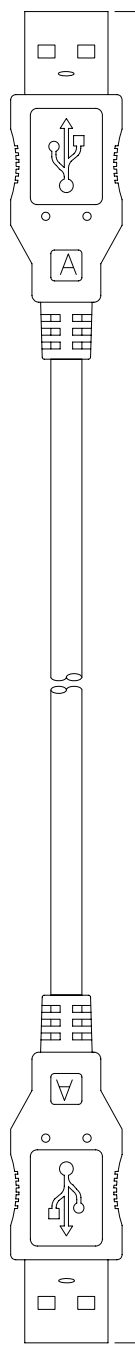


Signature	Date	Rev.
Norman Xu	Dec.20,2005	01

Revision History	Date	Rev.
For Bulk Production	Dec.20,2005	01

A USB A TYPE MALE
PLASTIC: WHITE
50000±50mm



D NOTES:

- CABLE: UL-2725 [28AWG(7/0.127)*1PR+24AWG(7/0.203)*2C +AL-FOIL/MYLAR+DRAIN WIRE(7/0.127)+65% BRAID]TIN PVC JACKET OD:4.7± 0.15mm COLOR:BEIGE REV 2.0
- CONNECTER:
 - P1: USB A TYPE MALE GOLD PLATED 30u" CONTACT, NICKEL PLATED SHELL REV 2.0.
 - P2: USB A TYPE MALE GOLD PLATED 30u" CONTACT, NICKEL PLATED SHELL REV 2.0.

- HOOD: MOLDED TYPE, PVC 45P, COLOR:BEIGE.
- TOOLING CAVITY INDICATION FOR INSPECTION
- ELECTRICAL TEST:
 - <1>100% OPEN SHORT & MIS WIRE TEST.
 - <2>CONTACT RESISTANCE 3 Ohms MAX.
 - <3>INSULATION RESISTANCE 20M Ohms MIN.

- PACKING:SEE P-0039 REV.C PACKING DRAWING
- PACKING TYPE: DB VP4
- (HANKING SIZE MUST BE SMALLER THAN PACKING)

P1	RED 1	P2	1 VCC
	WHITE 2		2 -DATA
	GREEN 3		3 +DATA
	BLACK 4		4 GROUND
	SHELL		BRAID
			SHELL

G

Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

Part No.	AK 700/5
Title:	USB2.0 Cable

RoHS Compliant

EAN Code:
4016032130253

H	1	2	3	4	5	6	7	H

STR1407

ASSMANN
Electronic GmbH

Scale	N/A	Sheet	1/1
Unit	MM		