


Signature	Revision History	Date	Rev.
Alex Dan	Drawing Reserved	Dec.20,2005	01

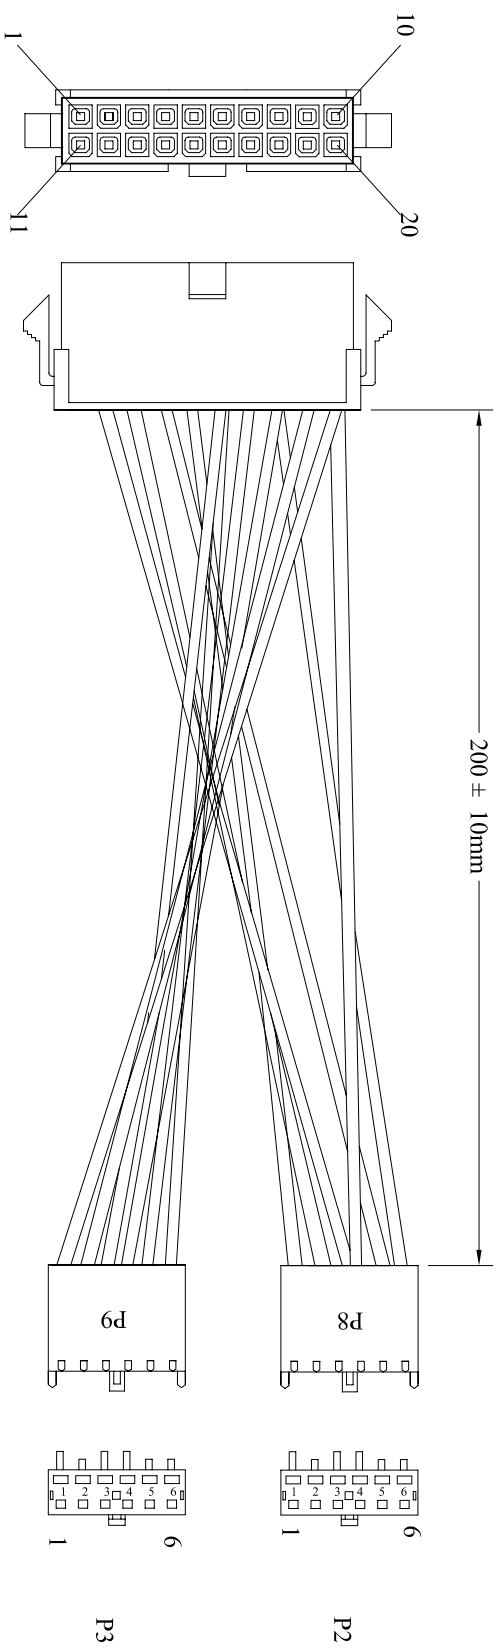

NOTES:

- 1.HOOK UP WIRE:UL-1007 18AWG
- 2.CONNECTOR:
P1:ATX FEMALE 2*10POS 4.2mm PITCH H.S.G. NYLON 66 UL94V-0, JMT P/N:C4201H00-2*10P
TERMINAL JMT P/N:C4201T0B-2 BRASS/TIN-PLATED FOR 18-22AWG
- P2&P3:6 POS 3.96mm PITCH HOUSING COLOR:WHITE MATERIAL:UL94V-0
MOLEX P/N:90331-0001 (OR EQUIVALENT JMT P/N:A3962H00-6P8)
MOLEX P/N:90331-0001 (OR EQUIVALENT JMT P/N:A3962H00-6P9)
TERMINAL:BRASS/TIN PLATING MOLEX P/N:08-50-0277
(OR EQUIVALENT JMT P/N:A3961T3B-2C BRASS / TINNED PLATED)
- 3.ELECTRONIC TEST:<1> 100% OPEN SHORT & MIS WIRE TEST
<2> CONTACT RESISTANCE 3 OHMS MAX
<3> INSULATION RESISTANCE 20M OHMS MIN
- 4.PACKING:SEE P-0039 REV.C PACKING DRAWING
(HANKING SIZE MUST BE SMALLER THAN PACKING)
PACKING TYPE: DB VP2

P1	3	4	5	6	7	8	10	12	16	18	19	20
	BLACK	RED	BLACK	RED	BLACK	ORANGE	YELLOW	BLUE	BLACK	WHITE	RED	RED
P2	2	5	1									
P3				3	5				6	4	2	1

Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

Part No.	AK ATX-AT
Title.	ATX-AT POWER SUPPLY CABLE

EAN Code:
40160332051176

ASSMANN
Electronic GmbH

STR.407

Scale	N/A	Sheet	1/1
Unit	MM		

1	2	3	4	5	6	7
A	B	C	D	E	F	G
H	H	H	H	H	H	H