

1

2

3




4

5

6

7

Signature	Revision History	Date	Rev.
Alex Dan	For Bulk Production	Dec.20,2005	01

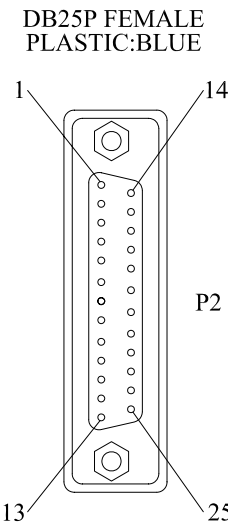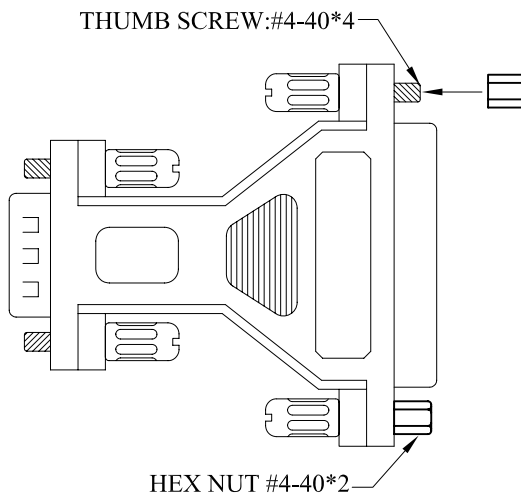

NOTES:

- 1.HOOK UP WIRE:28AWG(7/0.127)TINNED COPPER
- 2.CONNECTOR
- P1:DB9P MALE GOLD FLASH CONTACT,
 NICKEL PLATED SHELL.
- P2:DB25P FEMALE GOLD FLASH CONTACT,
 NICKEL PLATED SHELL.
- 3.HOOD:MOLDED TYPE, PVC 45P. COLOR:BEGIE.
- 4.ELECTRICAL TEST:
- (1)100% OPEN SHORT MIS WIRE TEST.
- (2)CONTACT RESISTANCE 3 OHMS MAX.
- (3)INSULATION RESISTANCE 20M OHMS MIN.
- 5.PACKING:SEE P-0039 REV.C PACKING DRAWING
- EAN CODE:4016032061038

<u>PIN OUT</u>			
P1	P2	P1	P2
1 _____	8	6 _____	6
2 _____	3	7 _____	4
3 _____	2	8 _____	5
4 _____	20	9 _____	22
5 _____	7	SHELL _____	SHELL

RoHS Compliant

	Date	Name
Drawn by	Dec.20,2005	Alex Dan
Checked by	Dec.20,2005	Norman Xu
Approved by		

Part No.

AB 914 F

Title.

DB 9M/DB 25F ADAPTOR

Scale	N/A	Sheet
Unit	MM	1/1

ST81407

1

2

3

4

5

6

7