


Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01


IEEEE1394 4PIN MALE  
INSULATOR:BLACK

IEEEE1394b 9PIN BILINGUAL MALE  
INSULATOR:BLACK

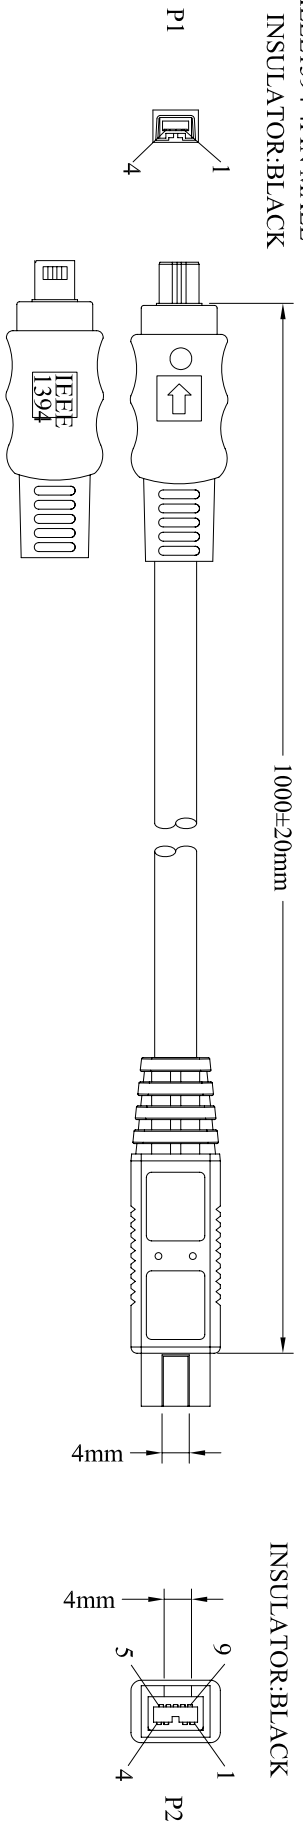

NOTES:

- CABLE: {30AWG(7/0.103)\*1PAIR+DRAIN WIRE(7/0.103)\*2C+AL/MY+MY\*2C +26AWG(7/0.163)\*2C+MY\*1+AL/MY+85% BRAID(16/6/0.12)} TIN  
30AWG INS:FO-SKIN ID:Ø0.9±0.01mm COLOR:RED&GREEN, BLUE&ORANGE  
26AWG INS:SR-PVC ID:Ø1.0±0.07mm COLOR:WHITE, BLACK  
PVC JACKET COLOR:BLACK OD:5.5±0.2mm  
UL20276 IEEEE 1394 CABLE
- CONNECTOR:  
P1: IEEEE1394 4PIN MALE GOLD PLATED 15U" CONTACT  
NICKEL PLATED SHELL.  
P2: IEEEE1394b 9PIN BILINGUAL MALE GOLD PLATED 15U" CONTACT  
NICKEL PLATED SHELL.

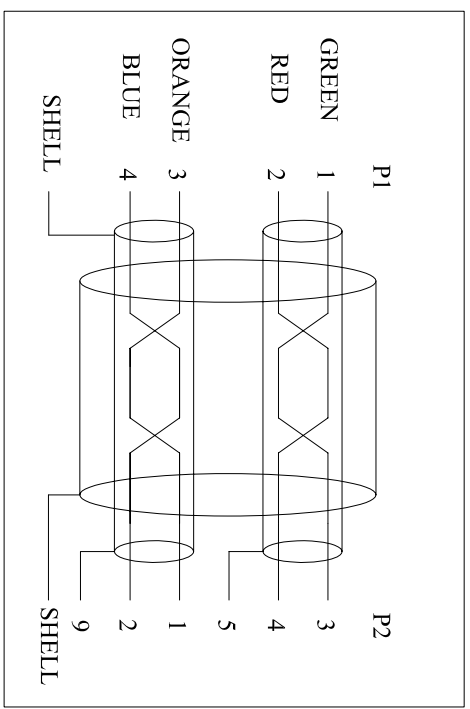

- HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK.
- TEST REQUEST:

- <1>.100% OPEN SHORT & MIS WIRE TEST
- <2>.CONTACT RESISTANCE 3 OHMS MAX
- <3>.INSULATION RESISTANCE 20M OHMS MIN
- <4>.HI-POT: DC 300V / 0.01 sec
- PACKING:SEE P-0039 REV.C PACKING DRAWING  
PACKING THPE: DB VP2.  
(HANKING SIZE MUST BE SMALLER THAN PACKING)

EAN Code:  
4016032142249

Date	Name
Dec.20,2005	Norman Xu
Checked by	Alex Dan
Dec.20,2005	
Approved by	

**ASSMANN**  
Electronic GmbH

Title:  
1394 4PIN MALE - 1394B 9PIN  
BILINGUAL MALE CABLE

Scale	N/A	Sheet
Unit	MM	1/1

1	2	3	4	5	6	7	A
1	2	3	4	5	6	7	H