


Signature	Revision History	Date	Rev.
N.Xu	For Bulk Production	Dec:08,2007	01

1000±20

USB A TYPE MALE

MINI USB 4P MALE

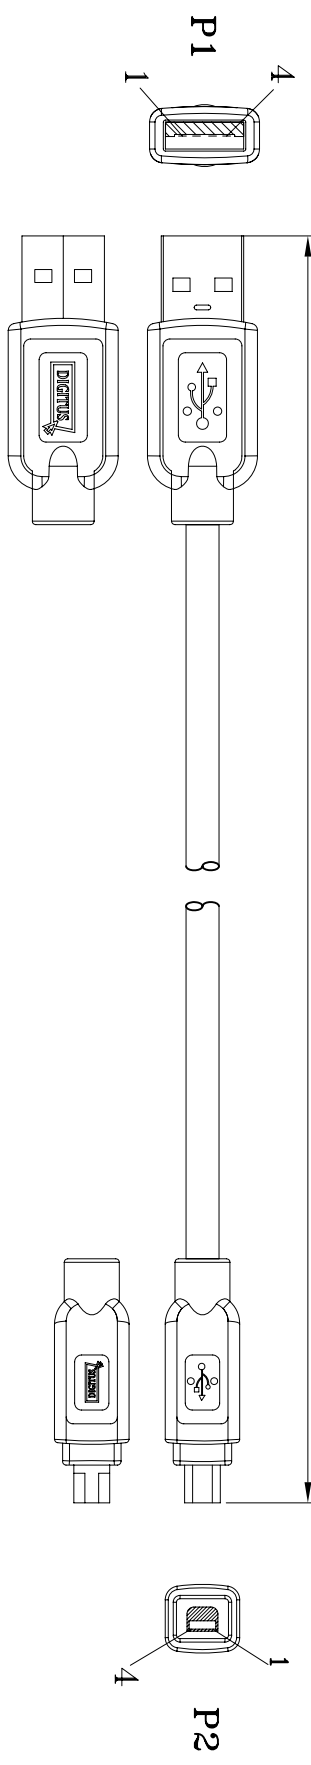

NOTES:

1.CABLE: UL-2725 28AWG\*2C+28AWG\*1PR+AL-FOIL/MYLAR  
 +SPRAL PVC JACKET (90P) OD:3.5±0.15mm  
 COLOR:BLACK.

2.CONNECTORS:

P1:USB A TYPE MALE GOLD FLASH CONTACT;  
 NICKEL PLATED SHELL.

P2:(MITZUMI)MINI USB 4P MALE EQUIVALENT (B TYPE)

3.HOOD:FIRST MOLD:MOULDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)  
 SECOND MOLD:MOULDED TYPE,PVC 45P COLOR:BLACK.

4.TEST REQUEST:

- <1>.100% OPEN SHORT & MIS WIRE TEST.
- <2>.CONTACT RESISTANCE 3 ΩMAX.
- <3>.INSULATION RESISTANCE 10M ΩMIN.
- 5.PACKING:SEE P-0039 PACKING DRAWING  
 (BINDING SIZE MUST BE SMALLER THAN BLISTER)

P1		P2
RED 1	_____	1
WHITE 2	_____	2
GREEN 3	_____	3
BLACK 4	_____	4
SHELL _____	SPRAL _____	SHELL _____

1	2	3	4	5	6	7	
A	B	C	D	E	F	G	H

Part No.	DK-112021		
Title	USB AM TO MINI USB 4PIN CABLE 2 COLOR MOLD WITH DIGITUS LOGO		
Drawn by	Dec:08,2007	N. Xu	
Checked by	Dec:08,2007	A.Dan	
Approved by	Dec:08,2007	T.Aulemann	

RoHS Compliant

STR1407

<b>ASSMANN</b> Electronic GmbH		
Scale	N/A	Sheet
Unit	MM	1/1