


Signature	Revision History	Date	Rev.
N.Xu	For Bulk Production	Dec:08,2007	01

1 2 3 4 5 6 7

USB A TYPE MALE

3000±30MM

MINI USB 5P MALE

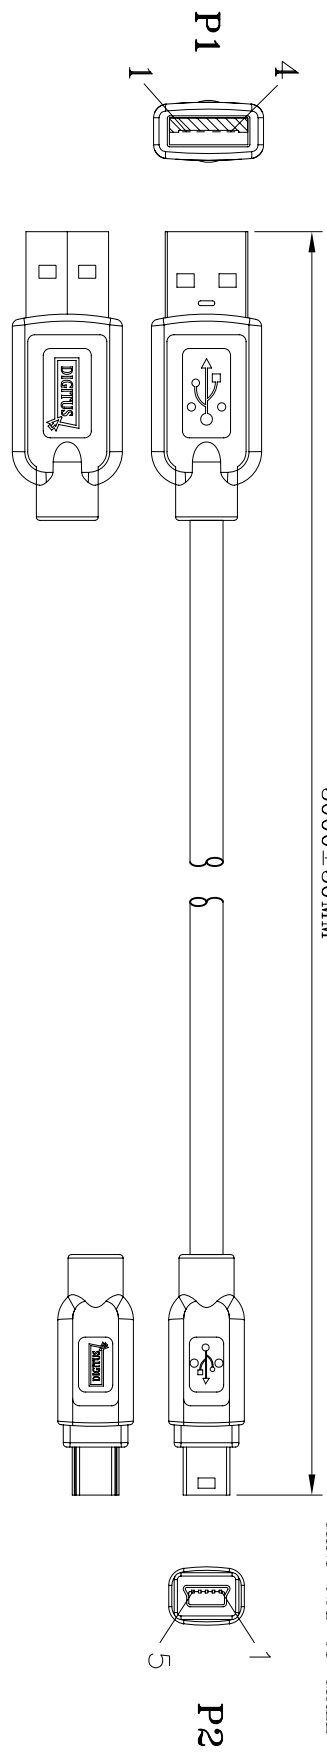

D

NOTE:

- 1.CABLE: UL-2725 [28AWG(7/0.127TC)]*1PAIR INS:HD-PE+24AWG(7/0.203TC)*2C INS:SR-PVC +AL-FOIL/MYLAR+DRAIN WIRE+BRAID(50%)TIN
PVC JACKET OD:Ø4.7±0.15mm COLOR:BLACK.
- 2.CONNECTOR:

P1:USB A TYPE MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.

P2:MINI USB B TYPE 5P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.

3.HOOD:FIRST MOLDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)

SECOND MOLD:MOLDED TYPE,PVC 45P COLOR:BLACK.

4.ELECTRICAL TEST:


<1>.100% OPEN SHORT & MIS WIRE TEST.

<2>.CONTACT RESISTANCE 3 OHM MAX.

<3>.INSULATION RESISTANCE 10M OHM MIN.

5.PACKING:SEE P-0039 PACKING DRAWING

(BINDING SIZE MUST BE SMALLER THAN BLISTER)

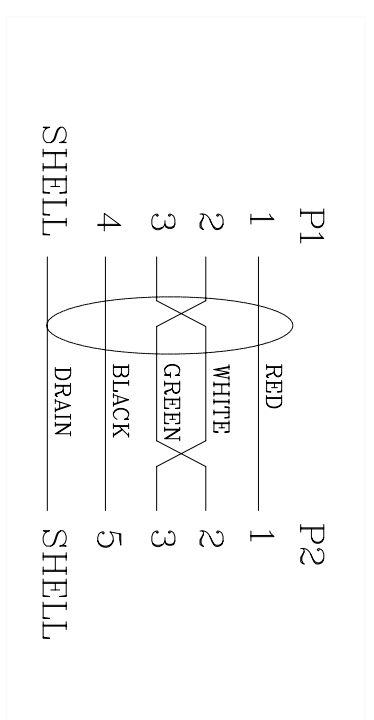

DK-112026

Date	Name	Part No.
Dec:08,2007	N.Xu	DK-112026
Checked by	A.Dan	
Approved by	T.Aulemann	

ASSMANN
Electronic GmbH

Title
USB A(M)-MINI USB 5P(M) CABLE
2 COLOR MOLD WITH DIGITUS LOGO

Scale	N/A	Sheet	1/1
Unit	MM		

RoHS Compliant

1 2 3 4 5 6 7

H

G

F

E

D

C

B

A