


Signature	Revision History	Date	Rev.
	For Bulk Production	Dec:08,2007	01

1 2 3 4 5 6 7

DB 25/M  
PLASTIC:BLACK

10,000±100

CN 36/M  
PLASTIC:BLACK

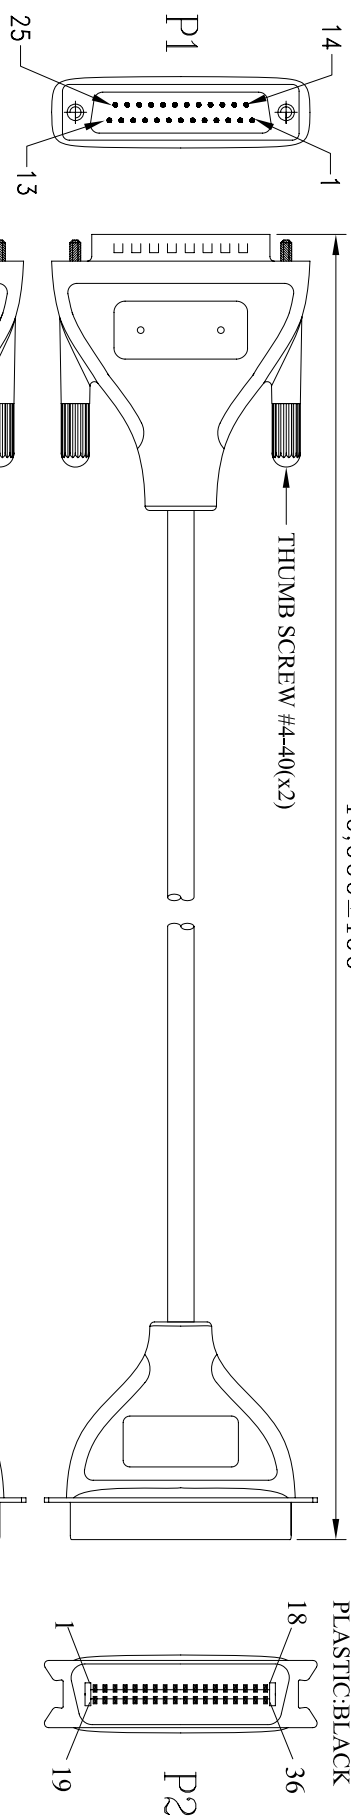

- P1 1 2 3 4 5 6 7 8 9 10 11 12 13 14  
 P2 1 2 3 4 5 6 7 8 9 10 11 12 13 14  
 15 16 17 18 19 20 21 22 23 24 25 SHELL  
 32 31 36 33 19 21 23 25 27 29 30 SHELL

NOTE:

1.CABLE:NON-UL 28AWG(7/0.127 T.C)\*25C INS:PVC +DRAIN WIRE+AL/MYLAR PVC JACKET;  
 COLOR:BLACK , OD:7.0±0.2mm

2.CONNECTOR:  
 P1:DB 25P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL.  
 P2:CN 36P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL.

3.HOOD:FIRST MOLD:MOLEDDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)  
 SECOND MOLD:MOLEDDED TYPE,PVC 45P COLOR:BLACK.

4.TEST REQUEST:100% OPEN SHORT & MIS WIRE TEST,  
 CONTACT RESISTANCE 3 OHMS MAX  
 INSULATION RESISTANCE 5M OHMS MIN

5.PACKING:SEE P-0039 PACKING DRAWING  
 (BINDING SIZE MUST BE SMALLER THAN BLISTER)

	Date	Name	Part No.
Drawn by	Dec:08,2007	N. Xu	<b>DK-113004</b>
Checked by	Dec:08,2007	ALDan	
Approved by	Dec:08,2007	T.Aulemann	
Title			
Print cable, Connect-D-Sub 25-Centri 36, 2 COLOR MOLD WITH DIGITUS LOGO			

RoHS Compliant

1 2 3 4 5 6 7

Scale Unit Sheet

N/A MM 1/1

STR1407