


Signature	Revision History	Date	Rev.
N.Xu	For Bulk Production	Dec.08.2007	01

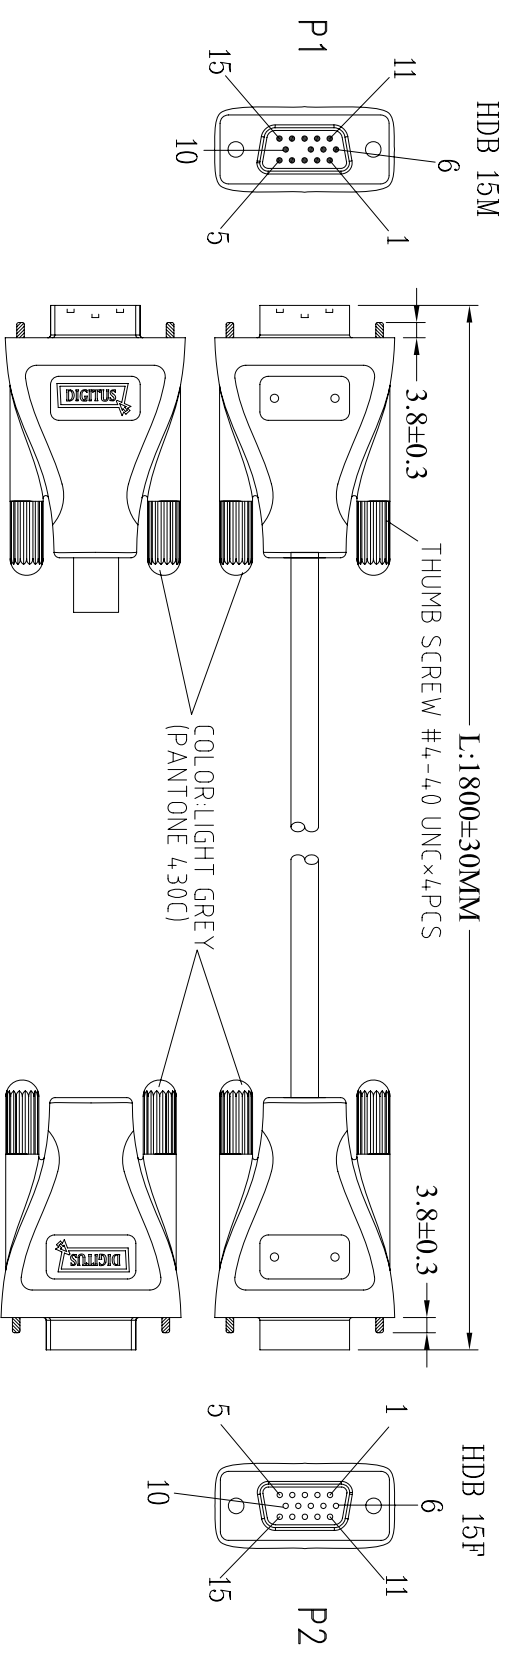

NOTE:
 1.CABLE:NON-UL 28AWG(7/0.127)TC*14C INS:PVC+DRAIN WIRE(26AWG 7/0.16)+AL-FOIL/MYLAR
PVC JACKET COLOR:BLACK ,OD:6.0±0.2mm,
 2.CONNECTOR:
 P1:HD15P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL(THE 9TH PIN UNLOAD)
 P2:HD15P FEMALE GOLD FLASH CONTACT, NICKEL PLATED SHELL
 3.HOOD:FIRST MOLD:MOULDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)
 SECOND MOLD:MOULDED TYPE,PVC 45P COLOR:BLACK.
 4.ELECTRICAL TEST:

<1>100% OPEN SHORT & MIS WIRE TEST.
 <2>CONTACT RESISTANCE 3 Ohms MAX.
 <3>INSULATION RESISTANCE 5M Ohms MIN.
 5.PACKING:SEE P-0039 PACKING DRAWING+EAN CODE
 (BINDING SIZE MUST BE SMALLER THAN BLISTER)

P1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	SHELL
P2	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	SHELL

A	1	2	3	4	5	6	7	
B	1	2	3	4	5	6	7	
C	1	2	3	4	5	6	7	
D	1	2	3	4	5	6	7	
E	1	2	3	4	5	6	7	
F	1	2	3	4	5	6	7	
G	1	2	3	4	5	6	7	
H	1	2	3	4	5	6	7	

Date	Name
Dec.08.2007	N. Xu
Checked by	A.Dan
Dec.08.2007	
Approved by	T.Aulemann
Dec.08.2007	

Part No.	DK-113032
Title	VGA MALE TO VGA FEMALE EXTENSION CABLE 2 COLOR MOLD WITH DIGITUS LOGO

RoHS Compliant

STR1407

ASSMANN
Electronic GmbH

Scale	N/A	Sheet	1/1
Unit	MM		